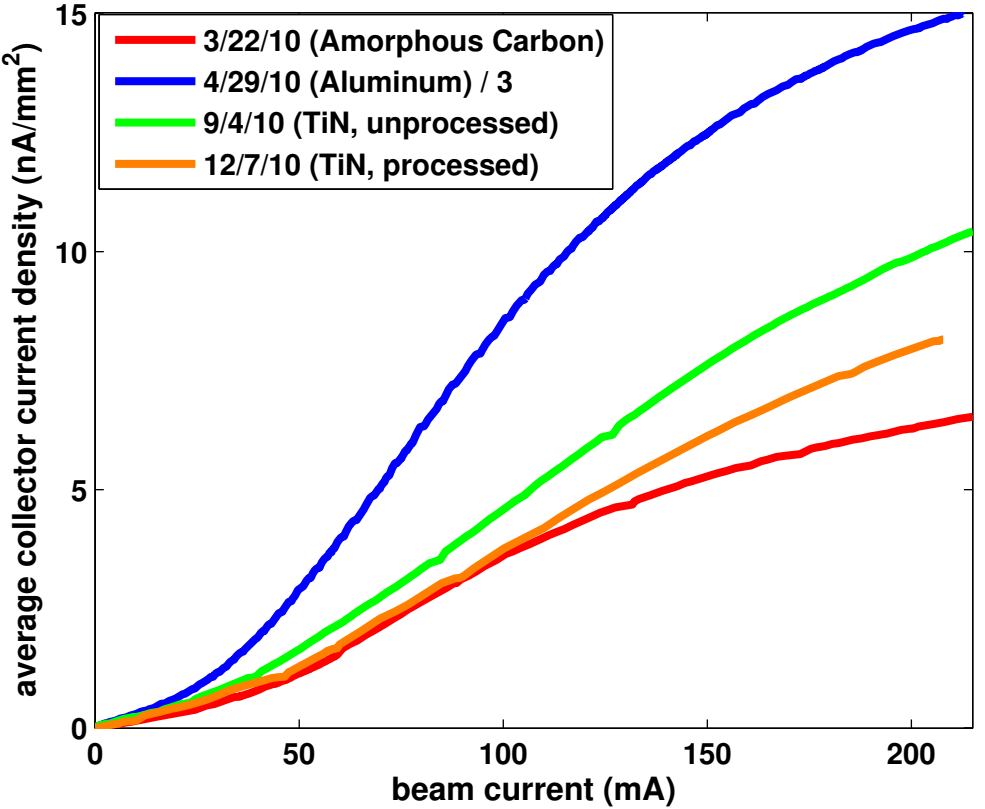
3/22/10 (Amorphous Carbon)
4/29/10 (Aluminum) / 3
9/4/10 (TiN, unprocessed)
12/7/10 (TiN, processed)
average collector current density (nA/mm2)
beam current (mA)
0
5
10
15
0
50
100
150
200