

# TPC Detector Response Simulation and Track Reconstruction

Physics goals at the Linear Collider drive the detector performance goals:

charged particle track **reconstruction resolution**:  $\delta(1/p) = \approx 4 \times 10^{-5} / \text{GeV}$

**reconstruction efficiency**: 100% within jets for energy flow measurements

Simple simulations, which represent the detector response as smeared space points, show that the track **reconstruction resolution** can be achieved with the “Large Detector”.

For example:

TPC:

2.0 m O.R., 0.5 m I.R., 150  $\mu\text{m}$  spatial resolution


Vertex Detector:

5 layer, 10  $\mu\text{m}$  spatial resolution

Intermediate Tracking Device:

2 layer,  $r=0.45$  m, 10  $\mu\text{m}$  spatial res.

$$\rightarrow \delta(1/p) = 4.2 \times 10^{-5} / \text{GeV}$$

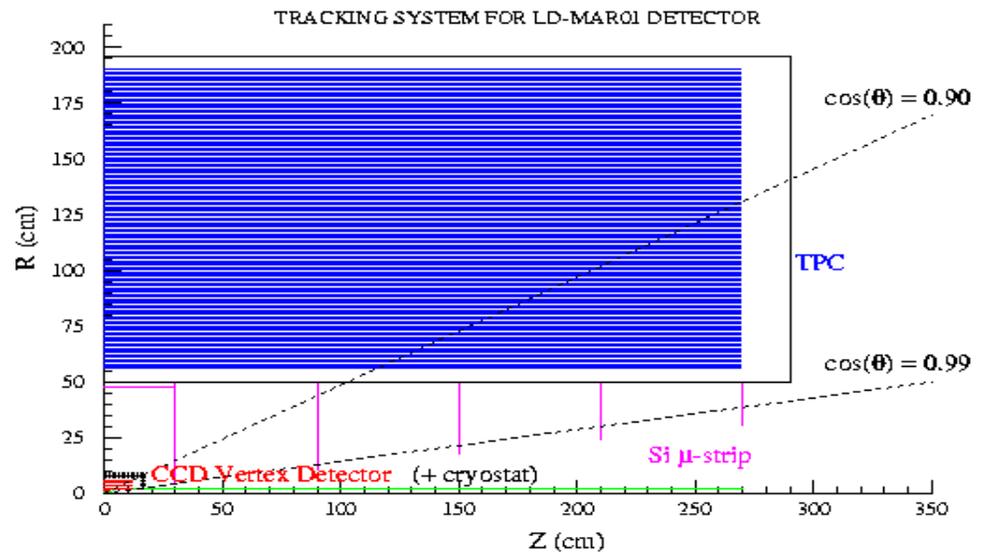

**Reconstruction efficiency** cannot be easily estimated in the event environment of the Linear Collider, it is dependent on the **non-Gaussian smearing effects: noise and track overlap**.

# Reconstruction Efficiency

While **reconstruction efficiency** is difficult to estimate,

one could achieve the **maximum efficiency** using the **maximum segmentation** possible with a GEM or MicroMegas amplification TPC.

However, the channel count would be excessive (and expensive);

[ 0.1 cm<sup>2</sup> pads ] à 2.4 x 10<sup>6</sup> multi-hit channels .

To optimize the detector design,

measure the **reconstruction efficiency** with respect to the detector segmentation,  
determine the **minimum segmentation** that provides the “full” efficiency.

A TPC design would be simpler if I can convince you that 0.4 cm<sup>2</sup> pads would be sufficient.

The goal of this work is to measure the **reconstruction efficiency** and thereby optimize the design for a TPC in the “Large Detector” design,  
incorporating as many real detector effects as possible  
( pad size, charge spreading, inefficient pads, noise ),  
for complicated physics events simulating Linear Collider processes,  
and using pattern recognition that starts with pad level information ( not space points) .

Many thanks to **Mike Ronan** for wrapping the Cornell reconstruction code in Java  
and providing a access to lcd simulation events in .sio format.

## Illustration of information provided by the MC: Sample event

Sample event from lcd simulation


(All hits are projected  
onto one endplate.)

143 layers from 56cm to 200 cm

**2 mm wide pads**, 1cm radial “height”  
(number of pads in layer  
is multiple of 8)



**charge spread is minimal**  
**no noise**

This would be similar to a situation  
with 1 mm pads and  
charge spreading to 2 pads,  
a very expensive detector.

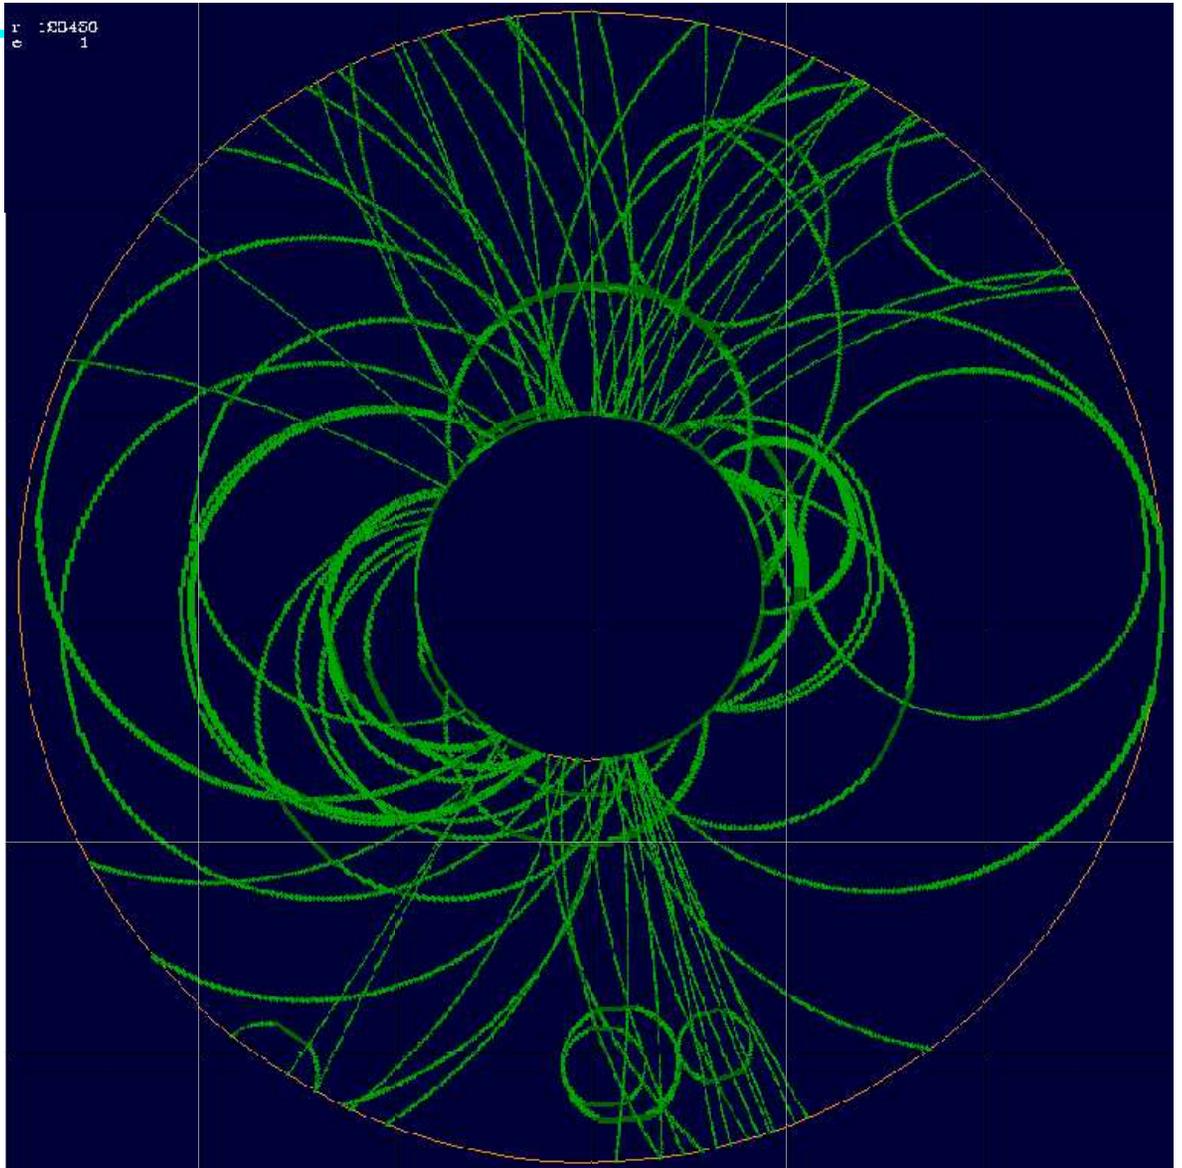

## Sample Event: Tracks within a Jet

(Same event, same pad response )

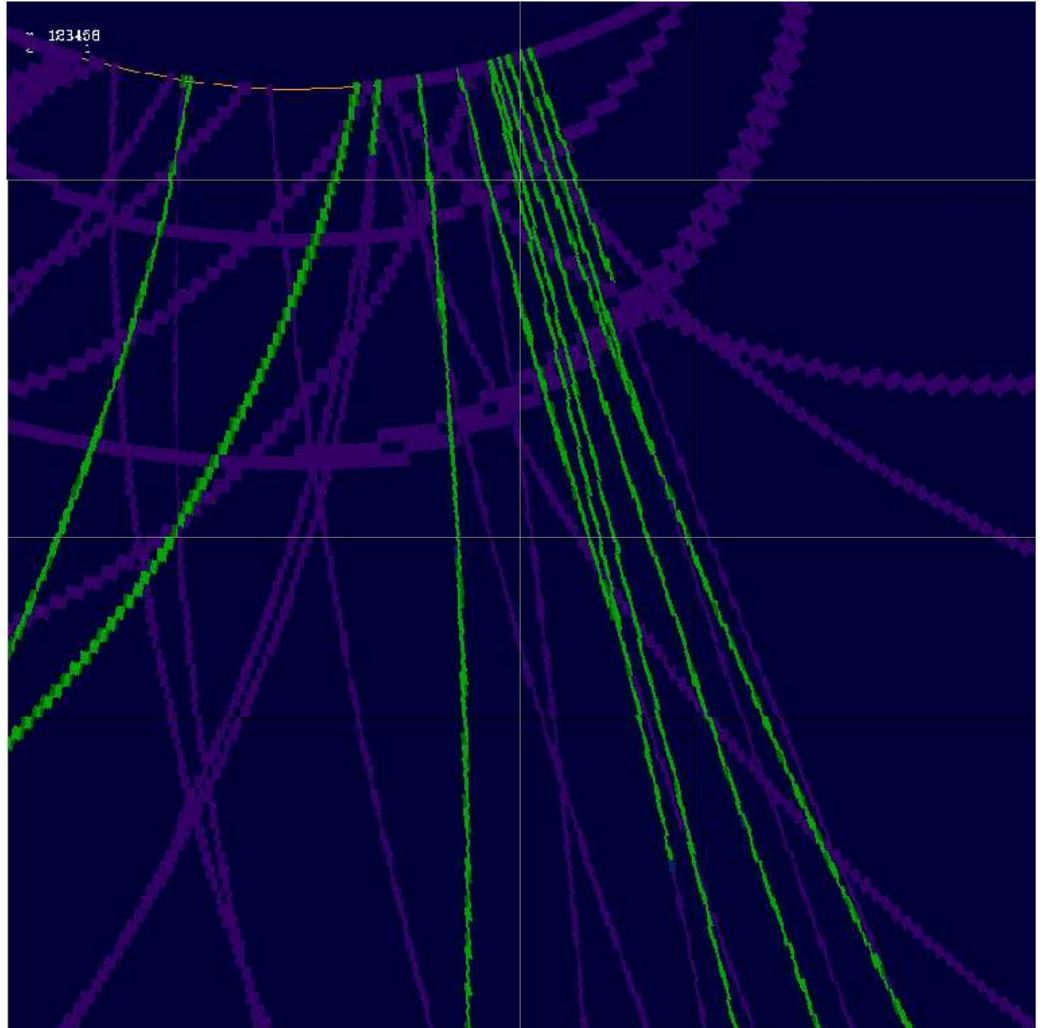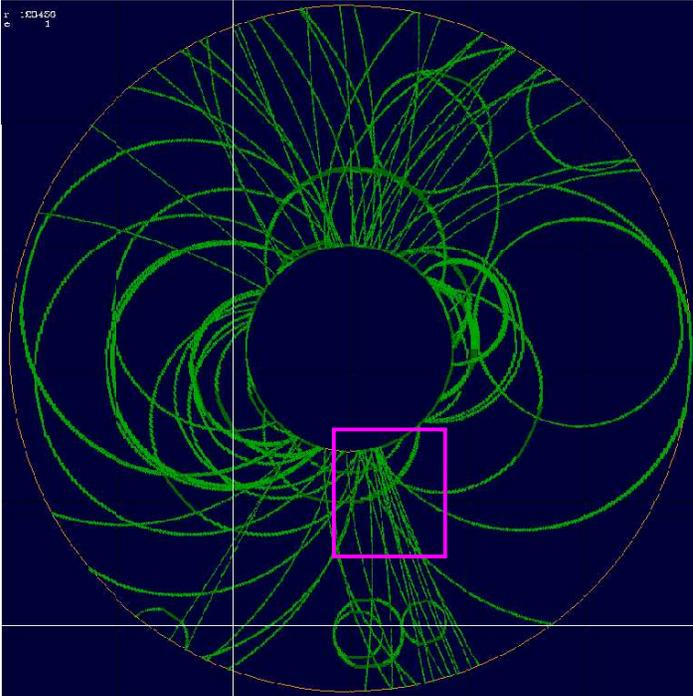


Tracks in a jet are usually separated.

It *appears* that, when taking advantage of the z separation, the reconstruction task would be simple.

Active cone:  $Z = [ r * (-6 / 80) ] \pm 4.7 \text{ cm}$

## Sample Event: Problem with Overlapping Tracks


(Same event, same pad response )

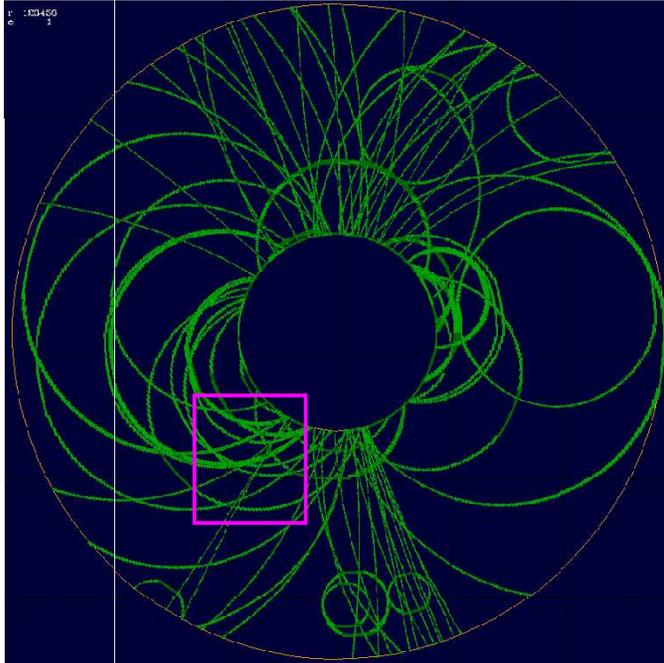

However, z separation is often too small to provide track separation.

**crossing tracks** in r-f, and z-separation = **1 mm** .

But, track reconstruction can be efficient for very close tracks by using information from regions where the tracks are isolated. This is an advantage of the pat. rec. to be described.

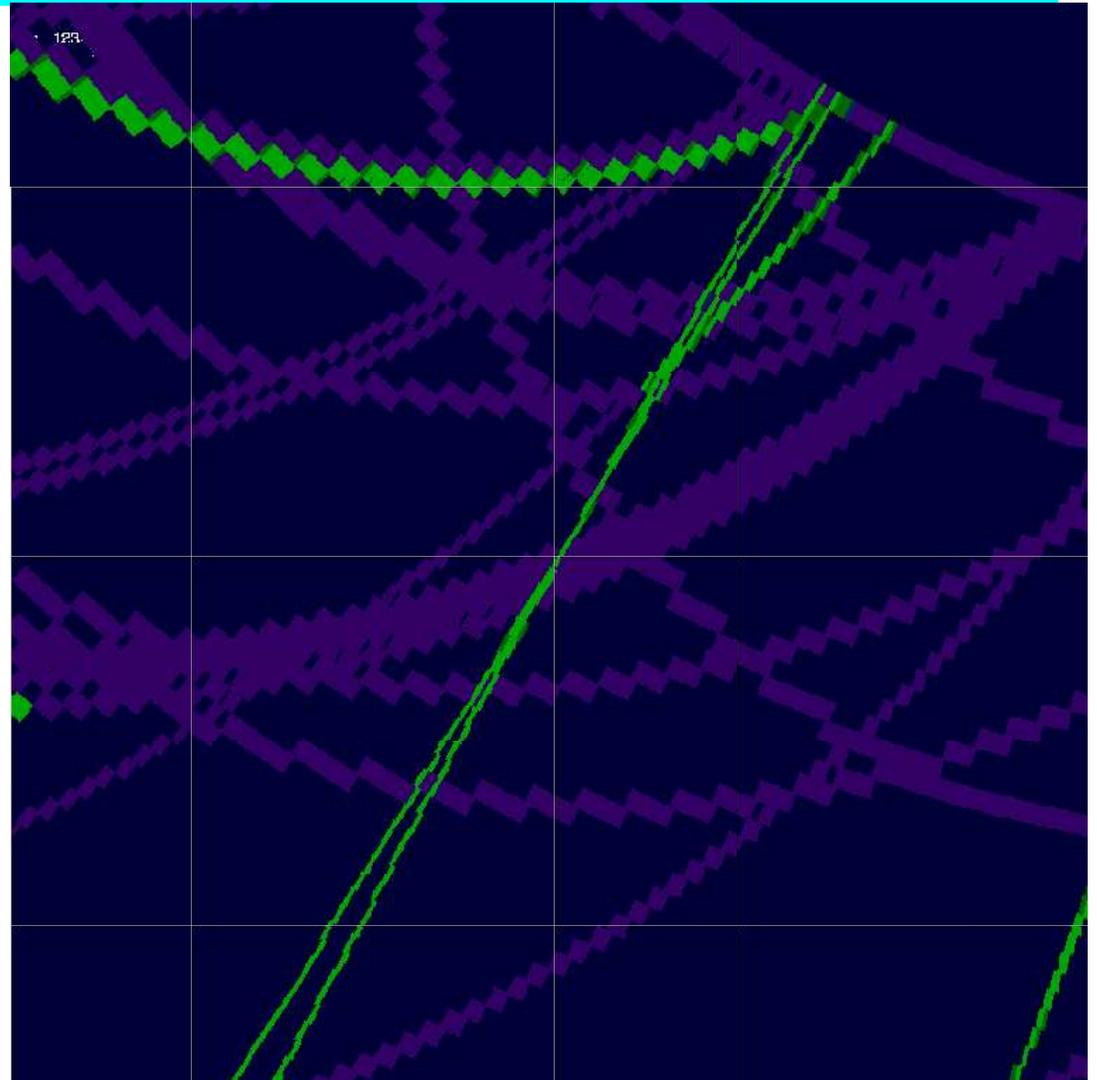


Active cone:  $Z = [ r * (-6 / 80) ] \pm 4.7 \text{ cm}$




# Detector Simulation: Pad Response ( and Clustering )

**The lcd simulation provides only crossing points;  
extensions to the simulation are created within the CLEO library.**

**Charge spreading** on the pads  
**Gaussian width, cut-off** ( $\sim .002$  of min.ion.),  
 maximum total-number-pads  
 charge is renormalized to provide a **total of min. ion.**

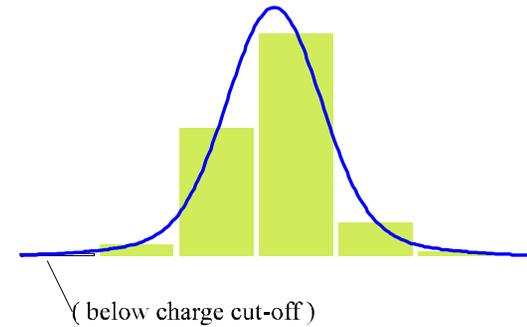


**Wave Form** to simulate time (=z) response

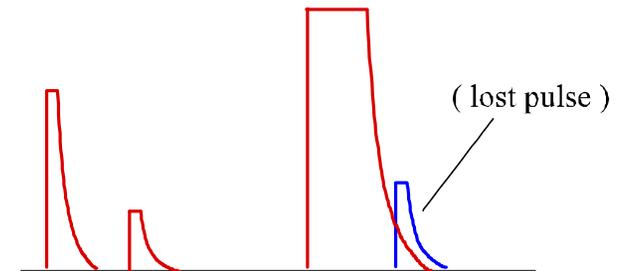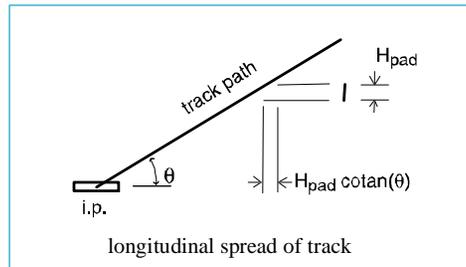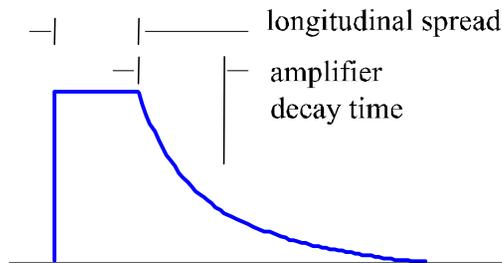



**Clustering in r-phi**  
 criteria for minimum **central pad** , added **adjacent** pads  
**splitting** at a local minimum,  
 can lead to pulse height merging and incorrect clustering.

Pads with  $> 0.51$  of the maximum are treated as “core pads”.  
 (a detail of the primary pattern recognition)

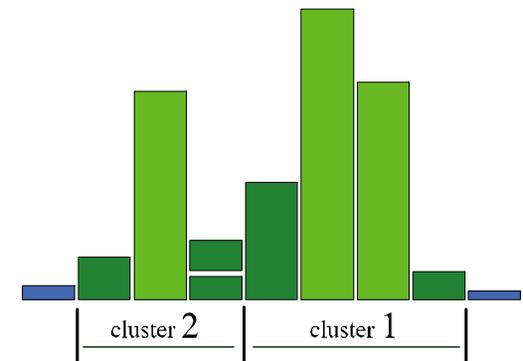

# New: Ionization distribution at large entrance angle

Cell width: 4mm

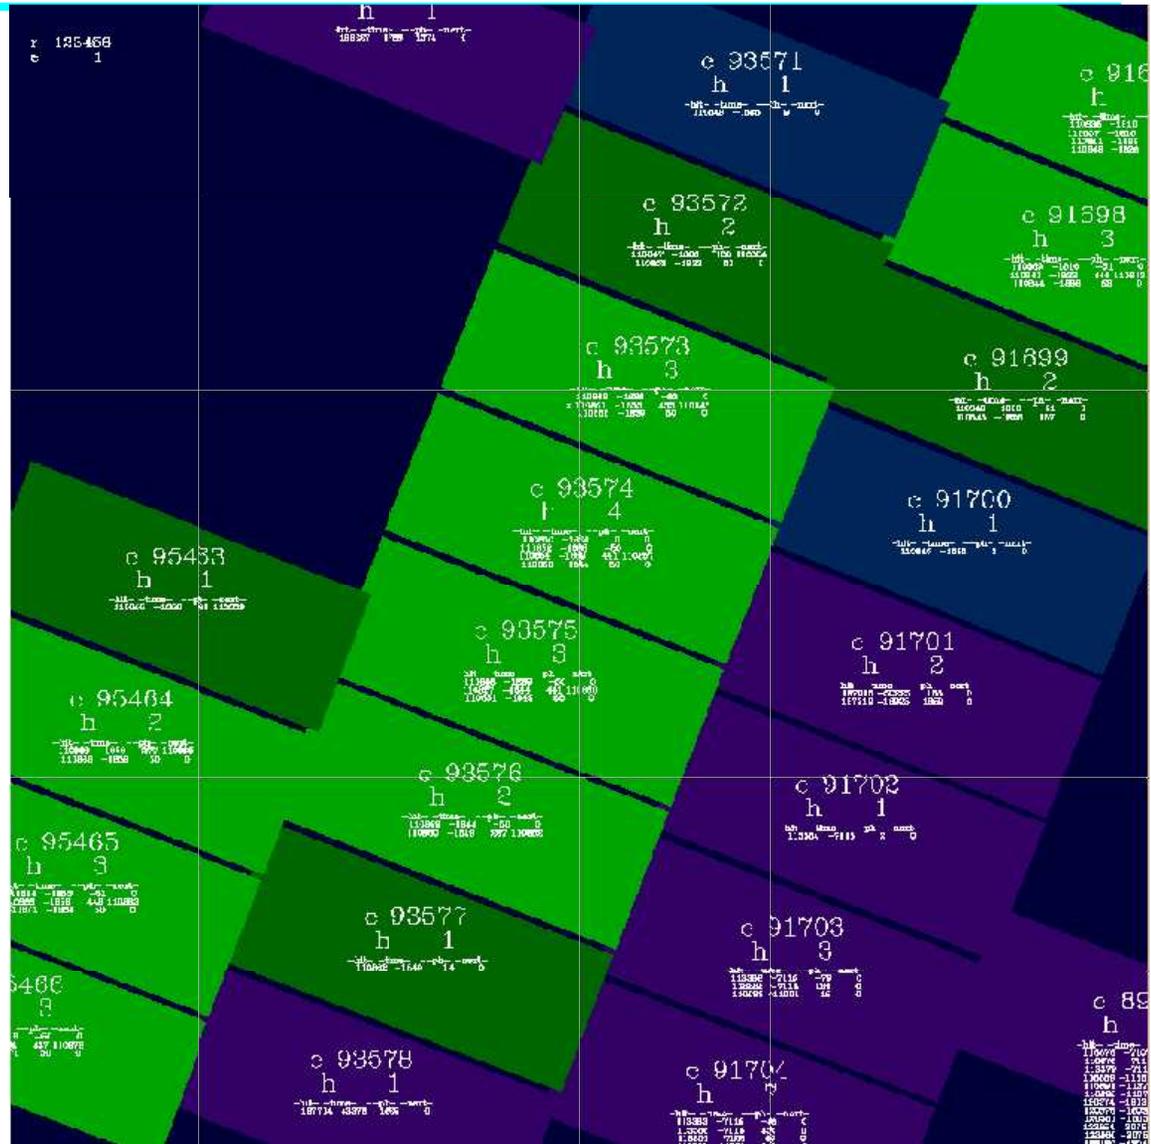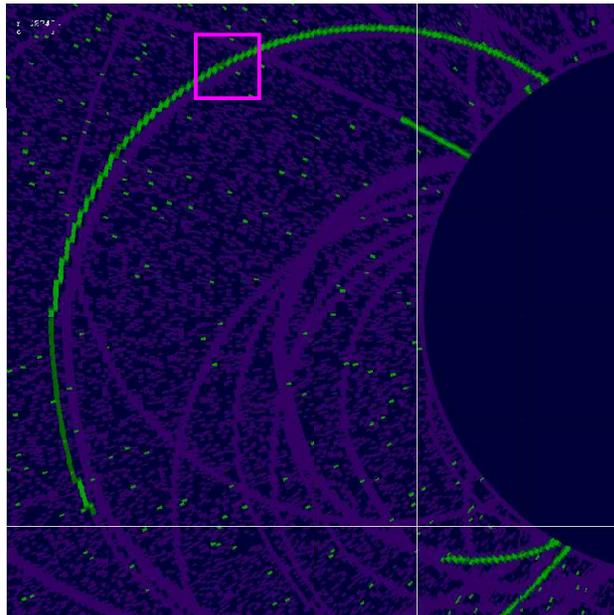

Ionization is spread across the cells.  
Previously, ionization was created only where the track crossed the central radius.

Also shown: multi-hits clustering

Active cone:  $Z = [r * (-3 / 80)] \pm 4.7 \text{ cm}$

## Track Reconstruction

With a goal of accurately measuring the TPC pad size and spreading that will provide the “full” **reconstruction efficiency** in Linear Collider physics events,

it becomes important to know what is being measured,

**inherent reconstruction efficiency, limited by the track overlap and hit distortion, and NOT an efficiency that is limited by the algorithm.**

**Require a means to independently determine the root cause of reconstruction failures.**

The CLEO reconstruction program include a diagnostics package that provides  
internal hit information  
and  
a graphics interface to the hit assignment,  
at intermediate stages in the programs.

This allows

**rapid determination the root cause of reconstruction failures** (on single tracks) and  
algorithm development.

# CLEO Track Reconstruction

The current CLEO charge particle track reconstruction

originally written for a drift chamber

(where z information is derived from the track and stereo layers),

can be adapted to any type of device with dense hit information (like a TPC, but not silicon)

by changing the details of how Z information is derived from the detector signals,


is highly efficient for overlapped tracks

(as shown in the event )


because any region of track separation can be used as a seed,

has 3 stages:

1. clean segment finding
2. initial track finding within the segment road
3. extension to more complicated regions (and other devices).

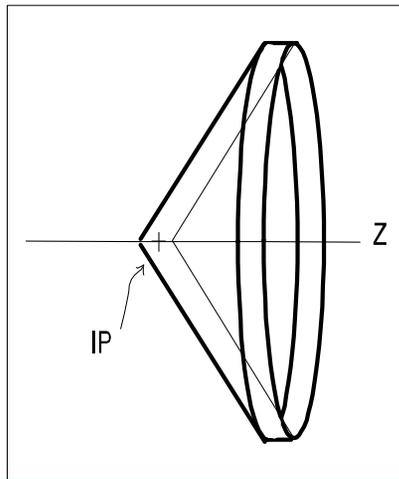

Segments are found in pre-selected, I.P. pointing, cones.

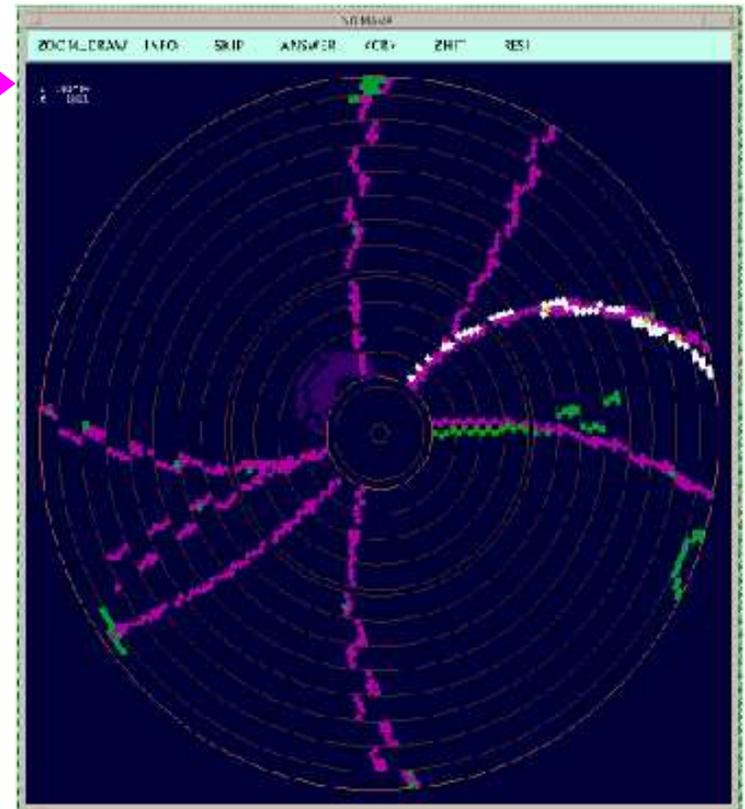

## Projected hits for event, after detector response simulation

Same event as slide3

**5 mm pads, 3.5 mm charge spread**

Noise: 0.003 occupancy  
in 3-d volume

1 cm (r- $\phi$ ) X 2 cm (z) X layer

Number of channels (1 side) 222 k

Number of layer crossings 14946


Number of track hits = 137019  
(each crossing creating ~ 9.2 hits)

Number of noise hits = 89385

Active hits in green

Ignored hits in purple

Active cone:  $Z = [ r * (-7 / 80) ] \pm 4.7 \text{ cm}$

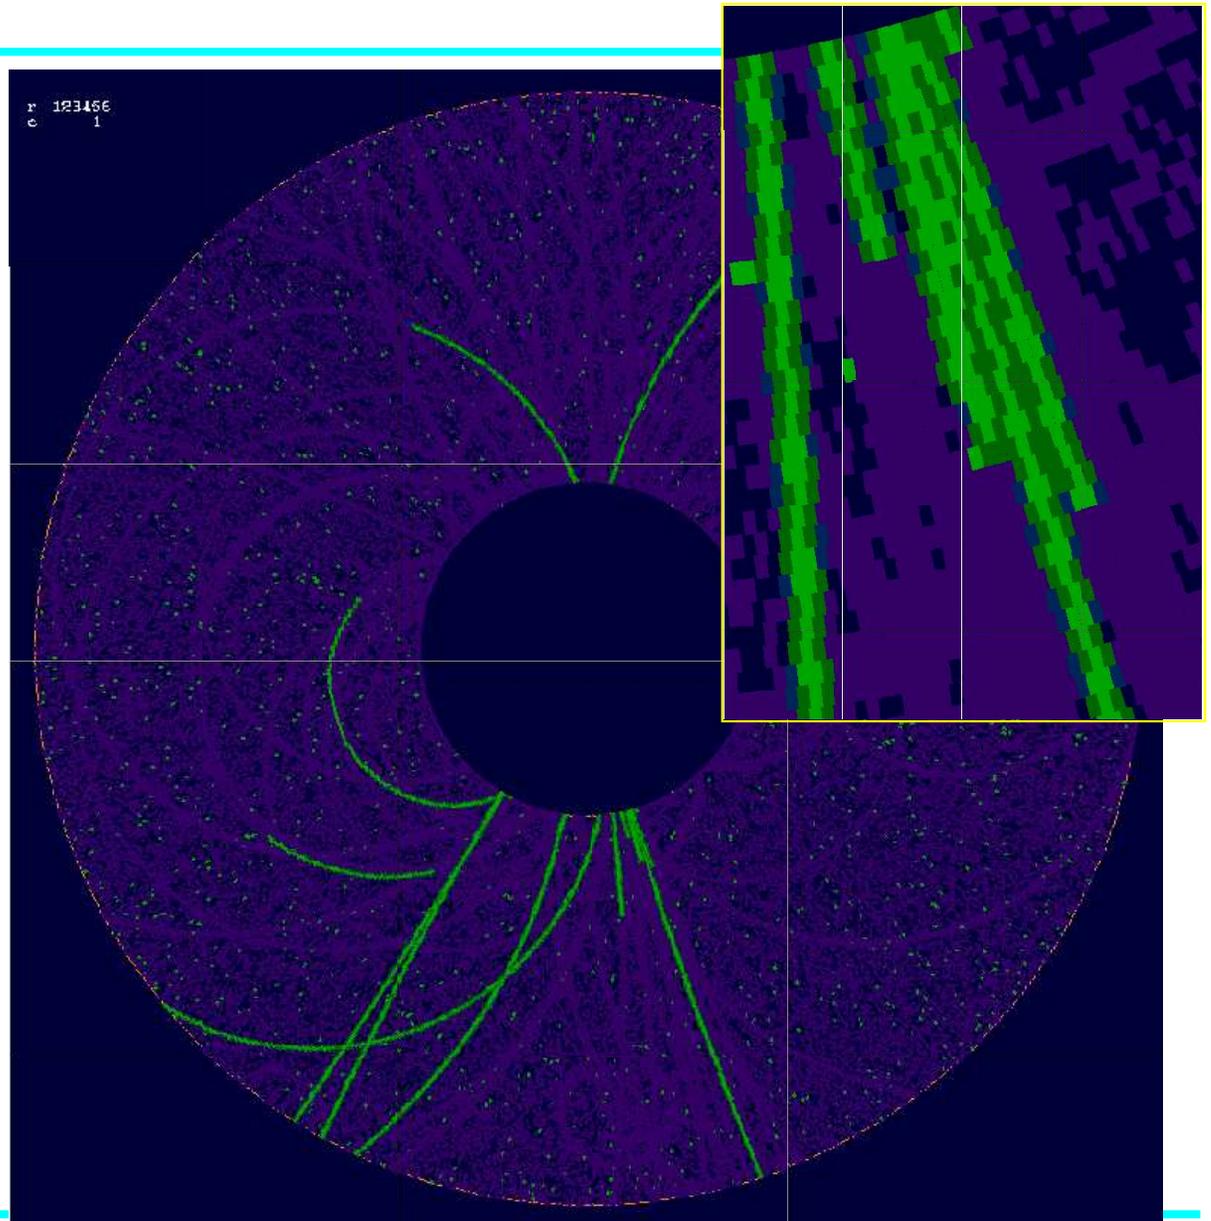

## Segment Finding Stage


Active hits in green

Ignored hits in purple


Current isolated segment is shown in **yellow**

Other isolated segments are shown in **pink**.

At this point, processing for segments is not complete; not all segments are found.

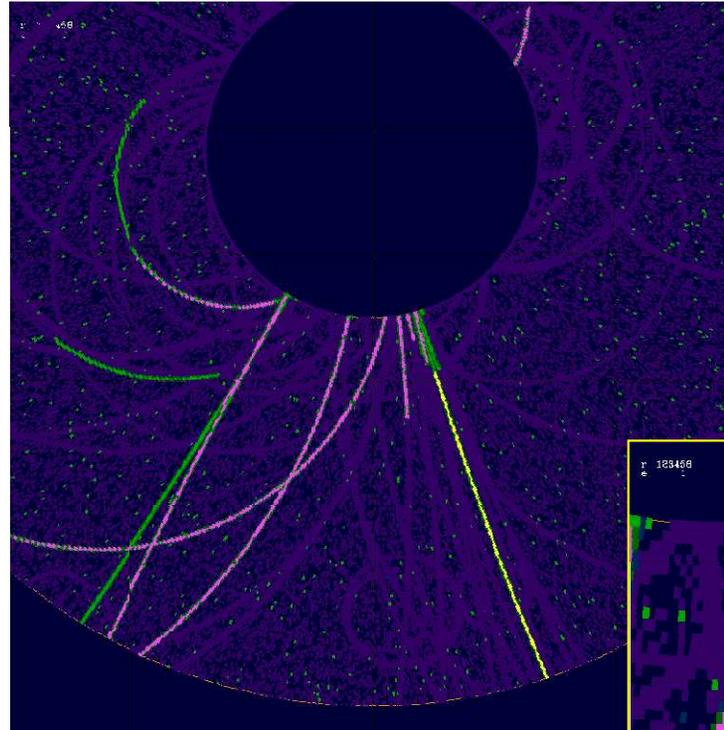

The segment has been extended into the overlap region.

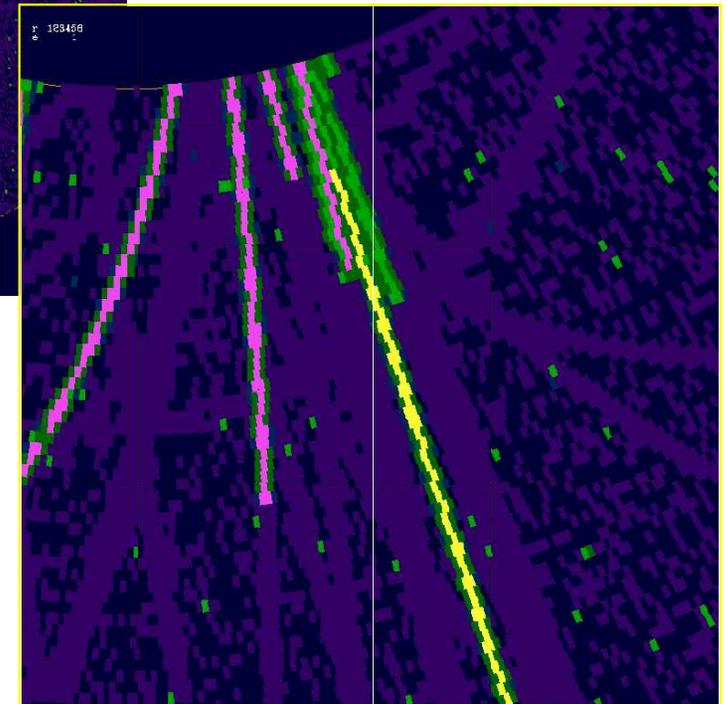

Segments are interrupted in regions of track overlap.

## After 2<sup>nd</sup> Phase, r- $\phi$ view

Hits in road in orange.

Hits on track in white .

5 mm pads


Track does not extend into track overlap region.

r- $\phi$  impact = 280  $\mu\text{m}$

$\chi^2$  (of the fit to a track) = 2  
with declared hit resolution: 100  $\mu\text{m}$

This implies that the hit resolution is too good;  
hit resolution = 141  $\mu\text{m}$  for 5 mm pads,

Smearing of the pulse heights is incomplete;  
requires low-level electronic noise.

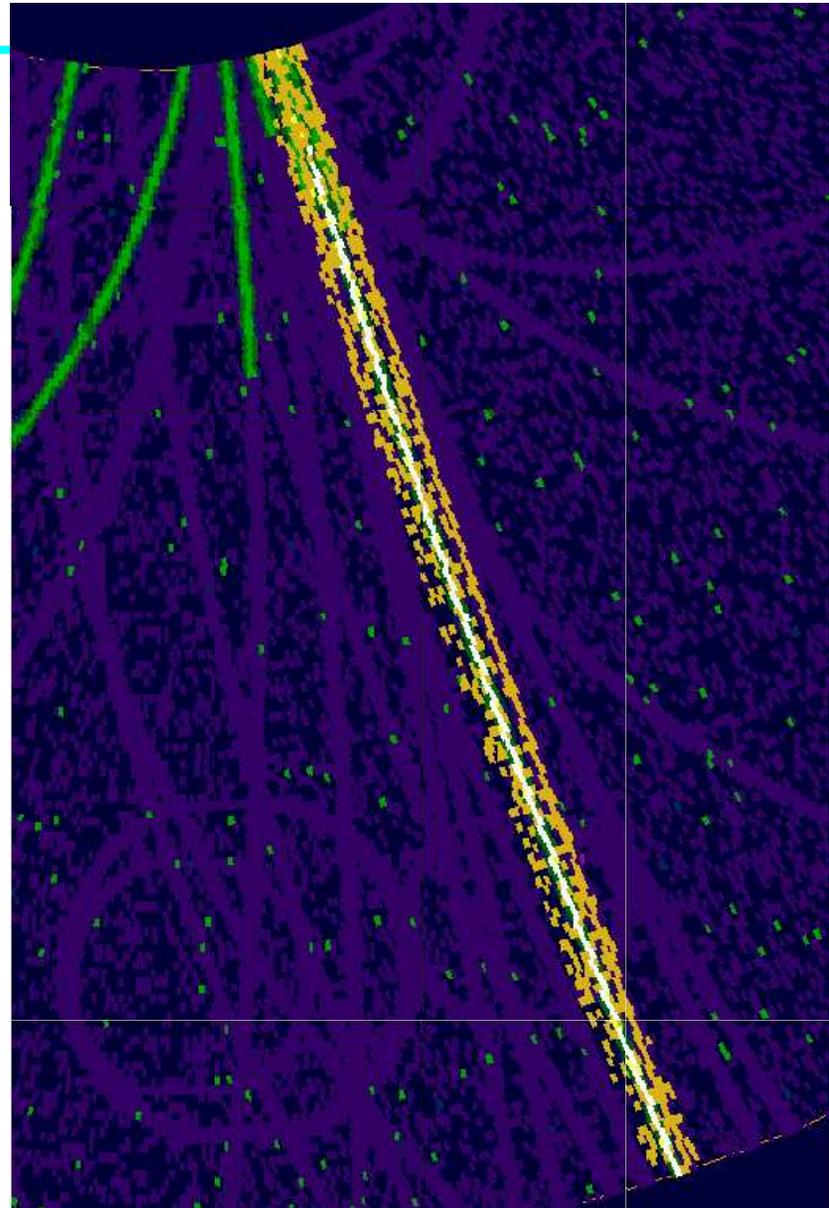

## After 2<sup>nd</sup> Phase, residual (r- $\phi$ ) view

PLOT: residual on horizontal  
( $\pm 0.025$  cm at edge)  
vs. radius on vertical

2<sup>nd</sup> phase pattern recognition uses  
local residual correlations

( radius is broken up into 16 parts )

In each radial part,  
look for correlated hits satisfying

used r- $\phi$  road  $< 0.005$  m


used z road  $< 0.10$  m .

As will be discussed later, there is only  
a weak requirement on the  
agreement of the  
average z-coordinate of the  
solutions in each radial part.

Then,  
select best solution in each radial part.

No solutions were found at low radius.

Note: other track.

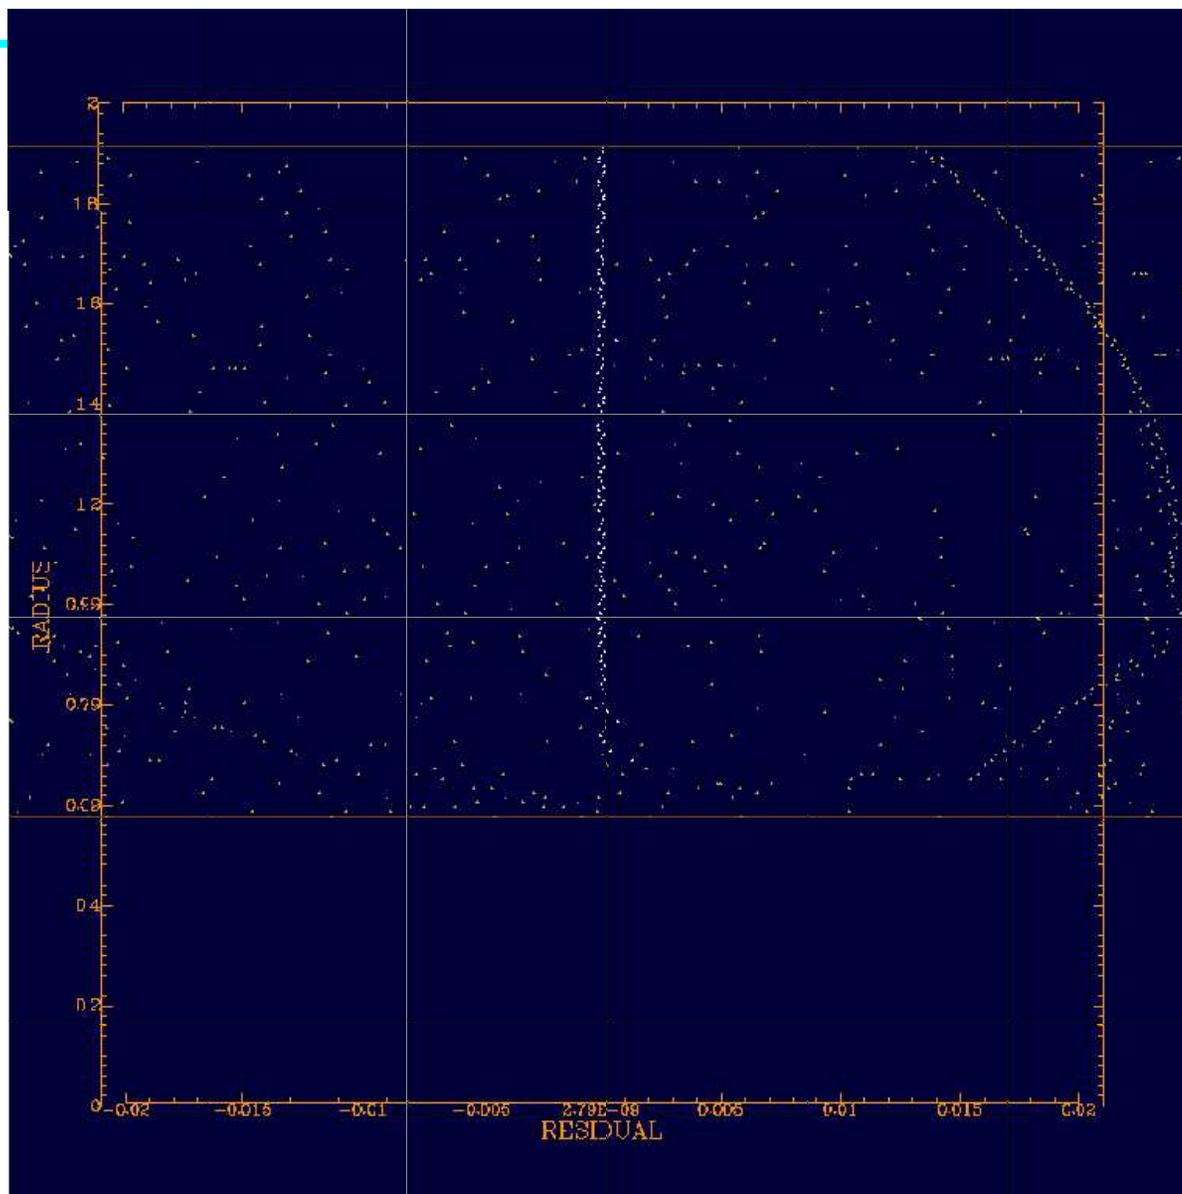

## After 2<sup>nd</sup> Phase, z view

Hits in road in orange.

Hits on track in white.


PLOT: Z on vertical  
( $\pm 2.5$  meter)  
vs. path length on horizontal

The other track is also very close in Z.

**Below .7 meter in arc length,  
the hits are merged  
and not usable, for either track.**

Note:

- other track (interference)
- short tracks that escape the  $r$ - $\phi$  road,
- curler, not completely in the  $r$ - $\phi$  road

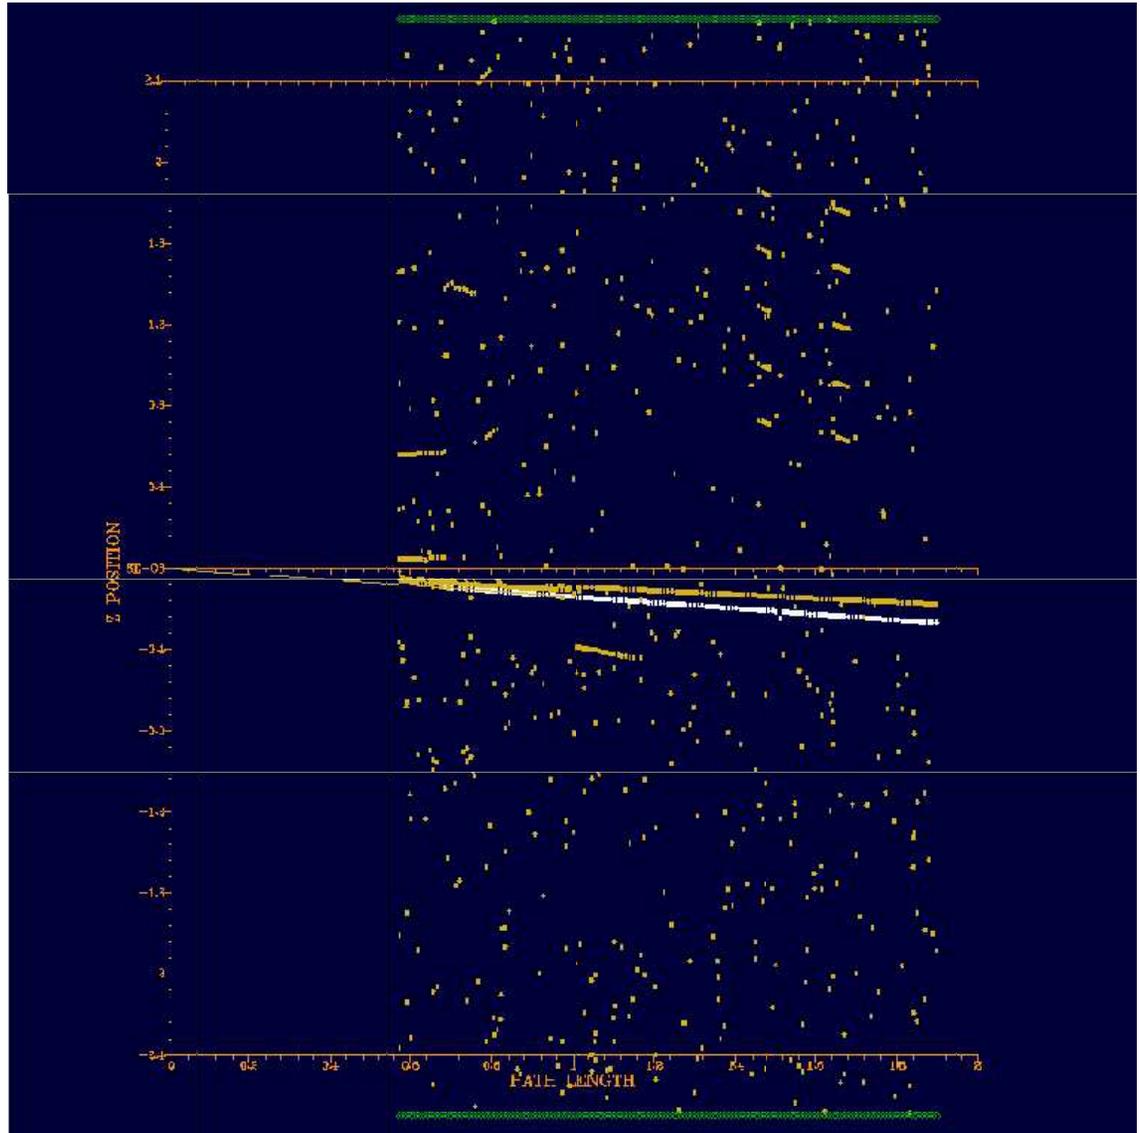

## MC tracks selected for efficiency studies

MC generated track list (not used)

- 1)  $\text{curv}_1, \phi_1, \text{impact}_1, Z0_1, \text{COS}(\theta)_1$
- 2)  $\text{curv}_2, \phi_2, \text{impact}_2, Z0_2, \text{COS}(\theta)_2$
- 3)  $\text{curv}_3, \phi_3, \text{impact}_3, Z0_3, \text{COS}(\theta)_3$
- ...
- ...
- N)  $\text{curv}_N, \phi_N, \text{impact}_N, Z0_N, \text{COS}(\theta)_N$

MC generated hit list

- 1) gen. track<sub>1</sub>, layer<sub>1</sub>, X<sub>1</sub>, Y<sub>1</sub>, Z<sub>1</sub>
  - 2) gen. track<sub>2</sub>, layer<sub>2</sub>, X<sub>2</sub>, Y<sub>2</sub>, Z<sub>2</sub>
  - 3) gen. track<sub>3</sub>, layer<sub>3</sub>, X<sub>3</sub>, Y<sub>3</sub>, Z<sub>3</sub>
  - ...
- i) gen. track<sub>i</sub>, layer<sub>i</sub>, X<sub>i</sub>, Y<sub>i</sub>, Z<sub>i</sub>
  - ...
  - j) gen. track<sub>j</sub>, layer<sub>j</sub>, X<sub>j</sub>, Y<sub>j</sub>, Z<sub>j</sub>
- ...
  - M) gen. track<sub>M</sub>, layer<sub>M</sub>, X<sub>M</sub>, Y<sub>M</sub>, Z<sub>M</sub>

Sub-list of contiguous generated hits satisfying...

- a) same generated track number
- b) starts at layer 1
- c) increasing layer number
- d) truncated if layer number decreases (top of curler)
- e) continues through at least 30 layers

**TRACK FIT**

“Plausible Track” List

- 1)  $\text{curv}_1, \phi_1, \text{COT}(\theta)_1, \text{impact}_1, Z0_1$
- ...
- n)  $\text{curv}_n, \phi_n, \text{COT}(\theta)_n, \text{impact}_n, Z0_n$

$$\text{Match } \chi^2 = (\Delta C / .002)^2 + (\Delta \phi / .003)^2 + (\Delta \text{COT} / .002)^2$$

## Preliminary “results”


Track finding efficiency  
dependence on pad width.

Require  $\chi < 25$  (defined on previous slide.)

Efficiency for straight tracks  
plateaus at  $\sim 4$ mm pad width, at  $\sim 97\%$ .  
(Discussion follows.)

( Recall: Noise: 0.003 occupancy  
in 3-d volume  
1 cm (r- $\phi$ ) X 2 cm (z) X layer )

Efficiency for curling tracks is worse.  
And, the efficiency is worse at the  
smallest pad width which can only be  
the fault of the pattern recognition.  
(Discussion follows.)

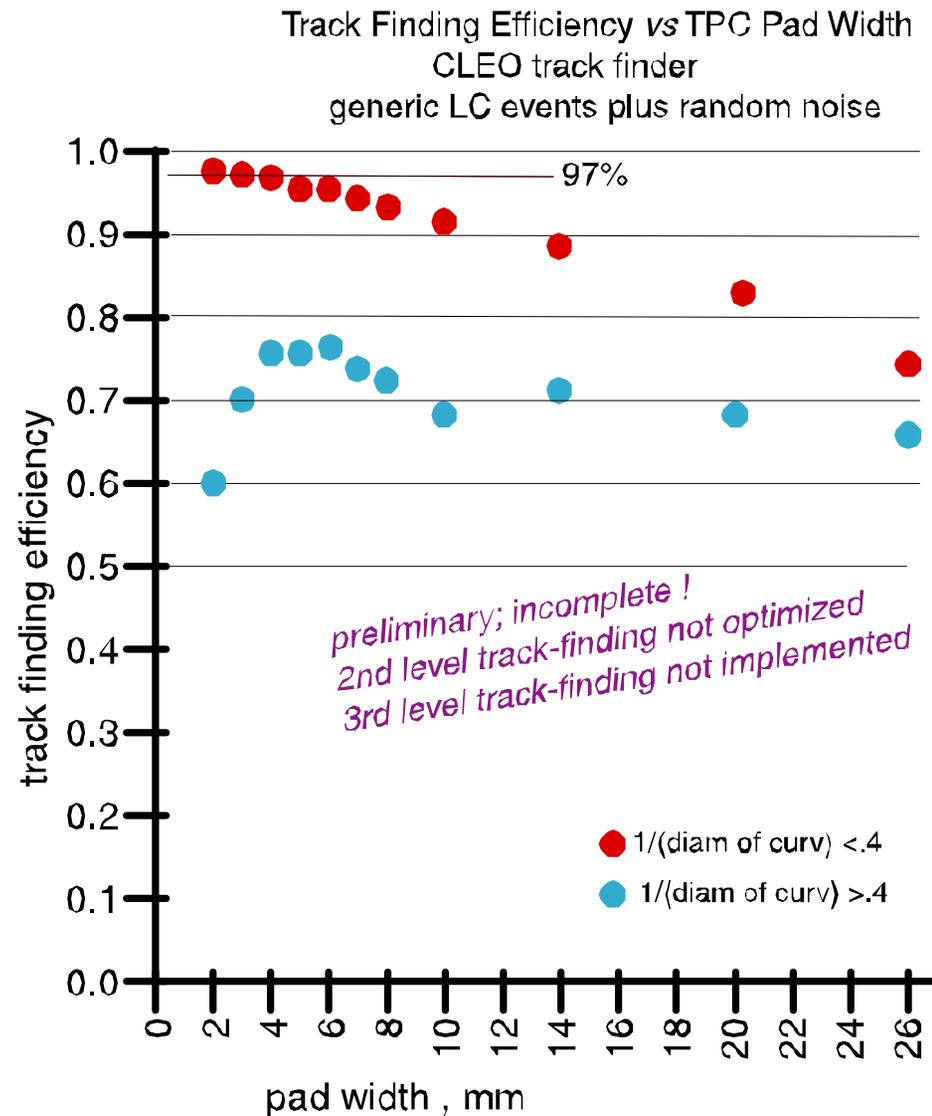


# Preliminary “results”, discussion


Efficiency for straight tracks plateaus at ~ 4 mm cell width (for this noise level).

Efficiency at plateau: ~ 97% . Reason: track search does not extend beyond  $COT(\theta) > 2$ .

(from slide 16)

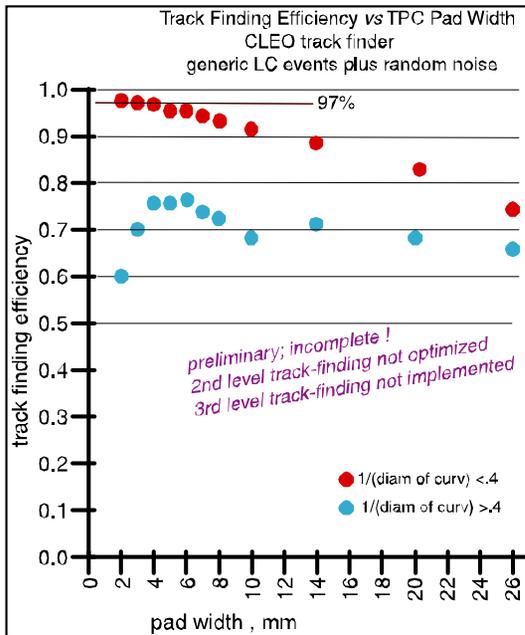

Number Of Tracks Lost / Found  
vs longitudinal angle of track  
for 2mm width TPC pads

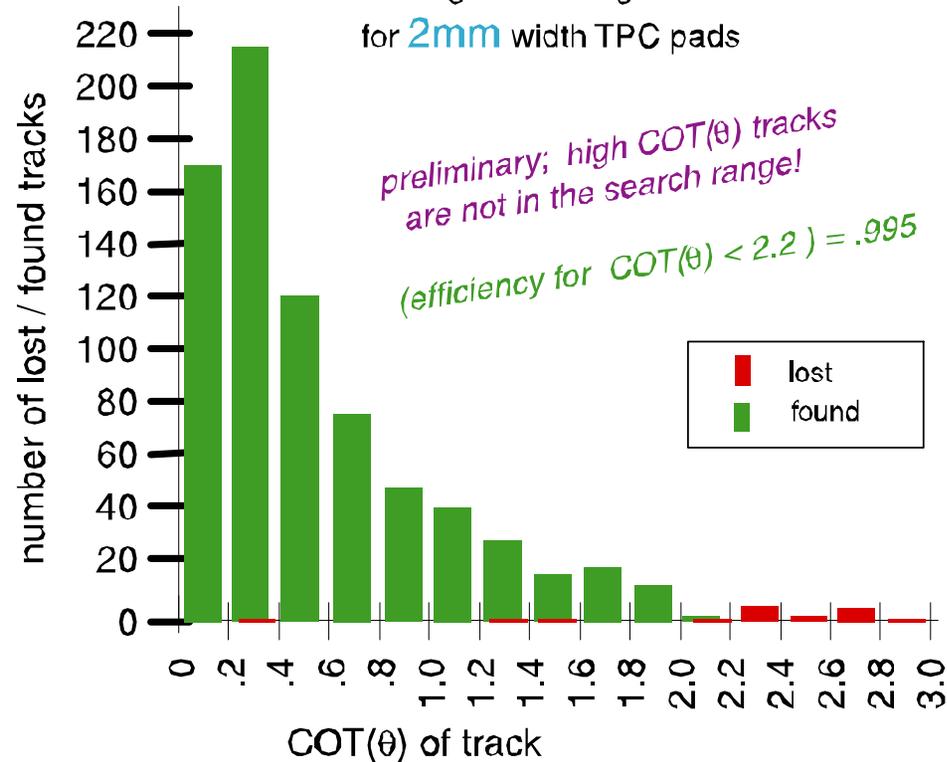



## Preliminary “results”, discussion

Efficiency for curling tracks extrapolates to ~ 80%.

Anomalous behavior: efficiency decreases for cell size < 4mm.

Curling tracks require more refinement, although improved since Berkeley. Separate treatment for straight and curling tracks may be required.

This will be addressed in the near future.

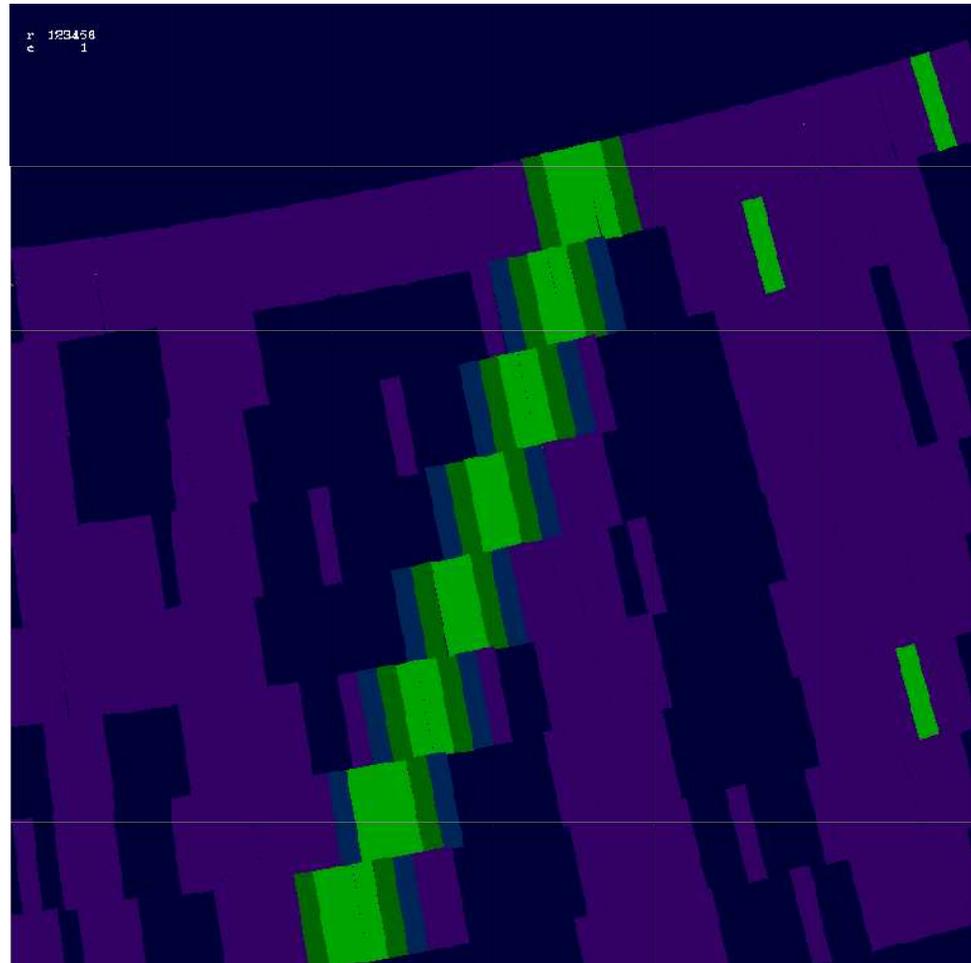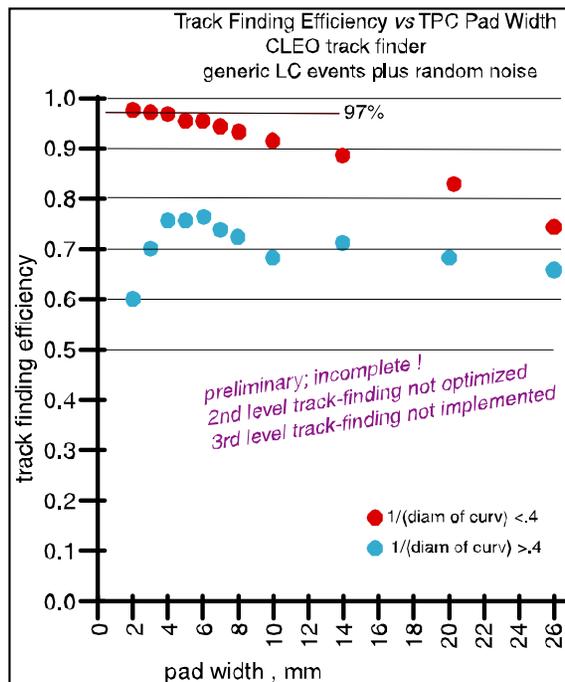




## Can the plateau be pushed to 6mm cell width ?

Compare track lists from 2mm and 6mm cell size.  
Identify 17 tracks lost with 6mm cell,  
out of the 763 tracks found with 2mm cell.  
Identify 2 pathologies.

### 1) large overlap within selection cone.

An isolated segment is found, but the ability to start with any isolated segment and extend is not yet implemented.

Basically, I am using the online version.

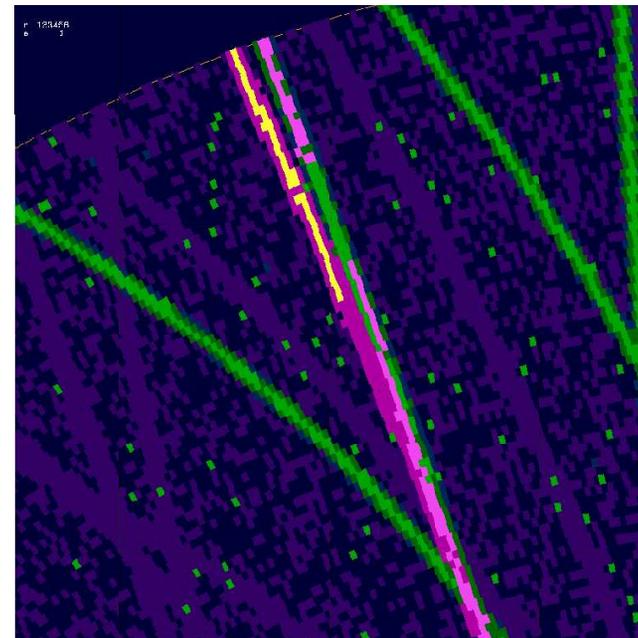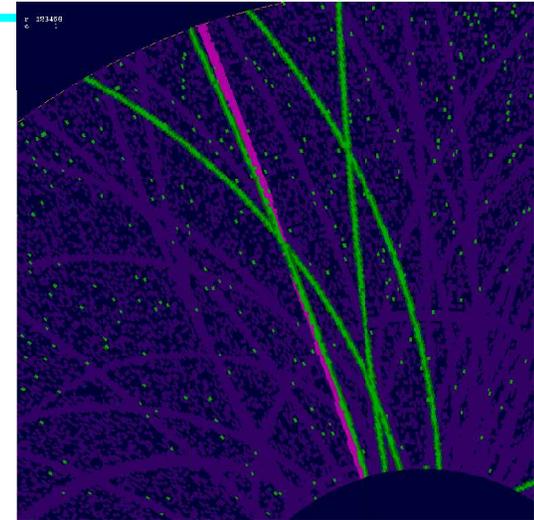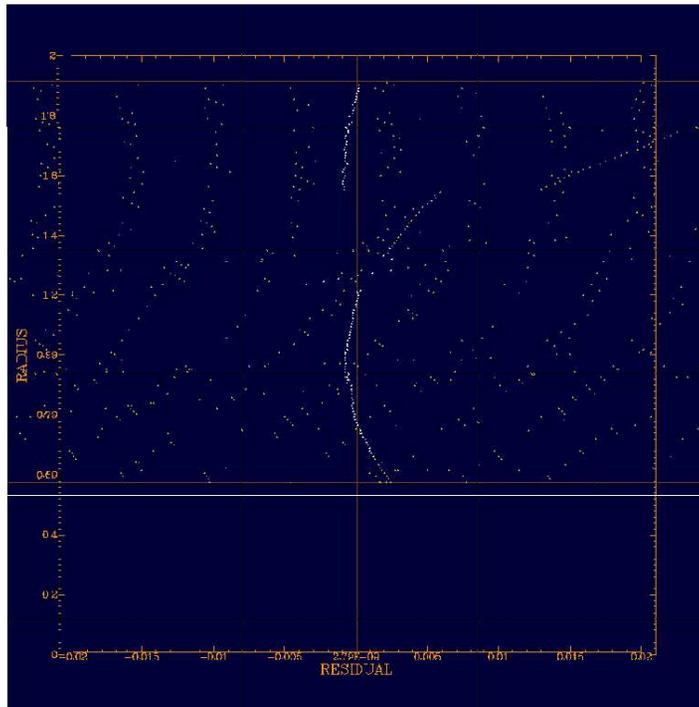


# Can the plateau be pushed to 6mm cell width ?

## 2) overlap at small radius,

Earlier described that the “best” solution, within a radial group, is selected.

Inconsistency of the Z solutions is observed, but the consistency requirement is not implemented.

Top: 6 mm cell  
Bottom: 2 mm cell

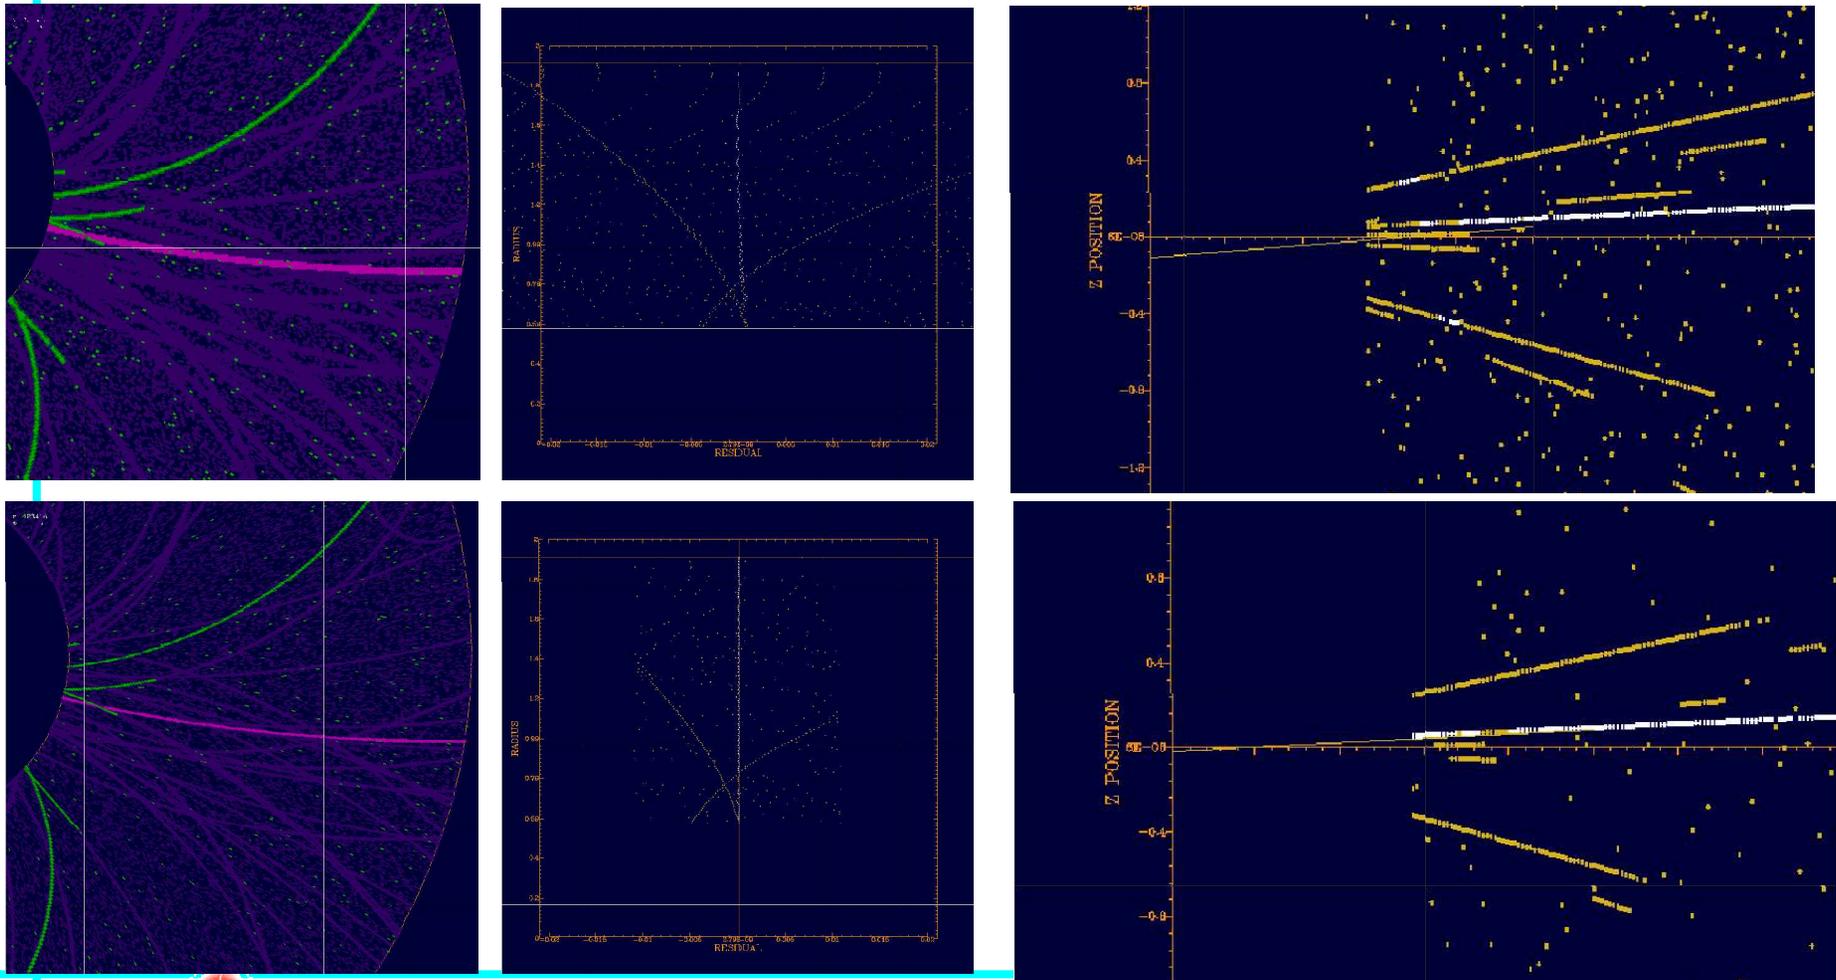

## Outlook

“Complete” at the SLAC 2004 ALCPG meeting:

interface to the LCD physics simulation through .sio file (Mike Ronan)  
create a TPC geometry, data structure, and detector response simulation  
within the Cornell/CLEO reconstruction  
create the TPC specific x,y,z hit reconstruction routines  
upgrade the reconstruction to handle multi-hit electronics  
procedure for scanning through the I.P. pointing cones and sorting tracks  
develop a method for identifying tracks that should be found

some optimization of the 1<sup>st</sup> level pattern recognition for TPC readout  
identification of pathologies limiting the efficiency at 6 mm pad width

Needed for efficiency studies: higher statistics

would like to have events with a specific 2 body process, e.g.  $Z \rightarrow \mu\mu$ .  
for resolution: apply **low level noise** to all pulse heights, fraction of min.ion.  
implement the full 2<sup>nd</sup> level pattern recognition to  
solve inconsistent z solutions and resolve overlapping tracks  
implement the 3<sup>rd</sup> level pattern recognition to extend overlapping tracks

Result: efficiency vs pad size: efficiency nearly plateaus at 4mm pad size

Future results: **efficiency** and resolution vs. pad size

charge spread, noise level, and 2-track separation,  $P$ , and  $\theta$

