REVISIONS				
SYM.	ZONE	DESCRIPTION	DATE	APP.
B		NEW DESIGN FOR LINEAR GUIDE	1/29/2006	SAB
C		Issued all design changes as Rev C	4/19/07	SAB

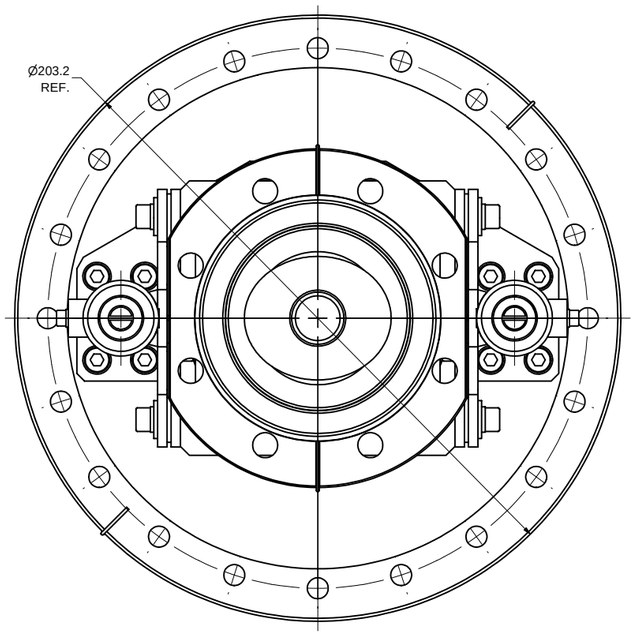

"A"

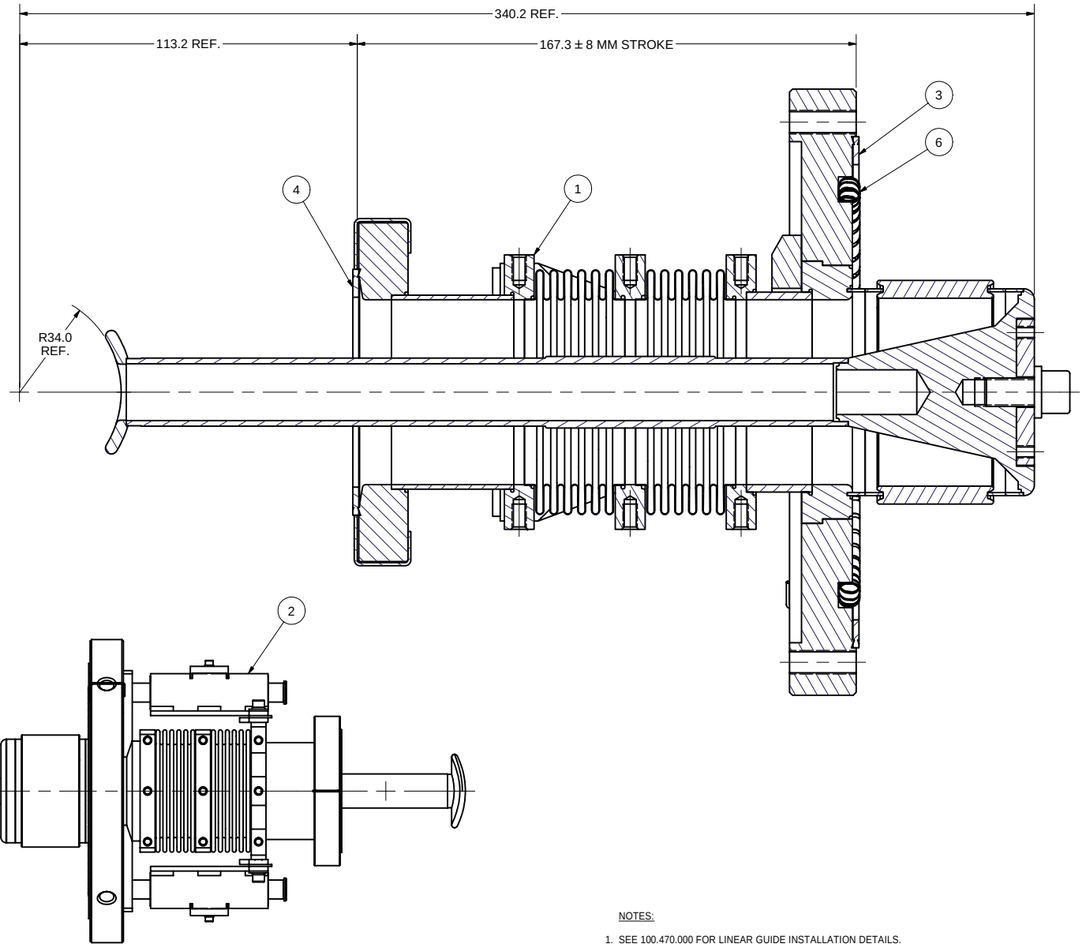

VIEW "B"
SCALE 1 : 2

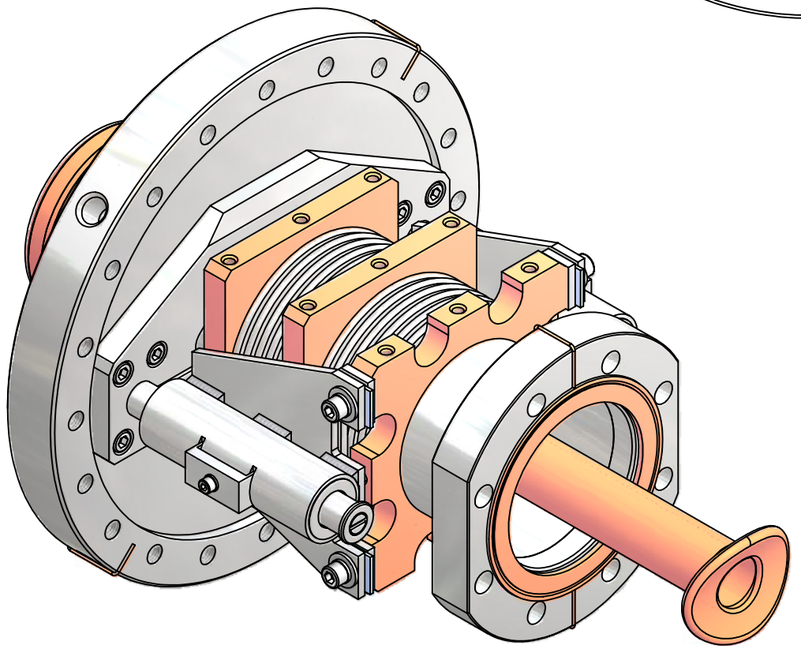

"B"

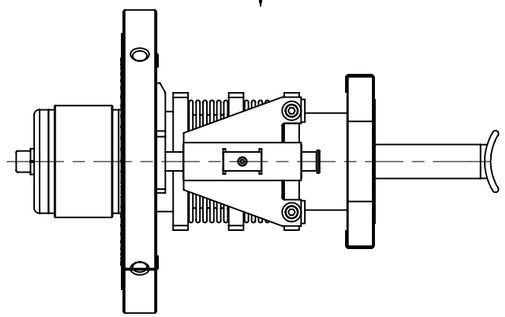

VIEW "A"
SCALE 1 : 2

NOTES:

1. SEE 100.470.000 FOR LINEAR GUIDE INSTALLATION DETAILS.

ITEM	DWG. NO.	DESCRIPTION	QUANTITY G1	G2	G3	REMARKS	REV.
6	-	SPIRA-SHIELD MS-20, L = 427 mm	1			SILVER PLATED	C
4	-	4-1/2" CON-TORR COPPER GASKET (ISI's 9912412)	1				C
3	-	8" CON-TORR COPPER GASKET (ISI's 9912812)	1				C
2	100.400.000	LINEAR GUIDE	1				C
1	100.300.000	COLD ASSEMBLY	1				C

PRINT DISTR. CR-1

PLOT DATE: 4/19/2007
CAD FILE NAME: 100-101-000-rev-C.idw

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES;
TOLERANCES ON:
.00 ± .010
.000 ± .005
FRACTIONS ± 1/64
ANGLES ± 0.5°
ALL SURFACES √

CHECKED BY: VGV
APPROVED BY: SAB

CORNELL UNIVERSITY LEPP
LABORATORY FOR ELEMENTARY-PARTICLE PHYSICS

CORNELL UNIVERSITY
Floyd R. Newman Laboratory
Ithaca, NY 14853

75 kW CW INPUT COUPLER
INPUT COUPLER, COLD

DRAWN BY	DRAWN FOR	DATE	SCALE			REV.
VM	SAB	1/29/2006	1:1	D	100.101.000 SH. NO. 1 OF 1	C

D | 100.101.000 | REV. C