


NOTES:

1. Round sharp edges $R = 0.2$ mm.
2. Degas ceramics for 1 hour at 800°C in clean vacuum ($P < 10^{-5}$ mbar). After that, handle with gloves only.
3. Pack in lint-free paper or non-polymeric plastic bag.

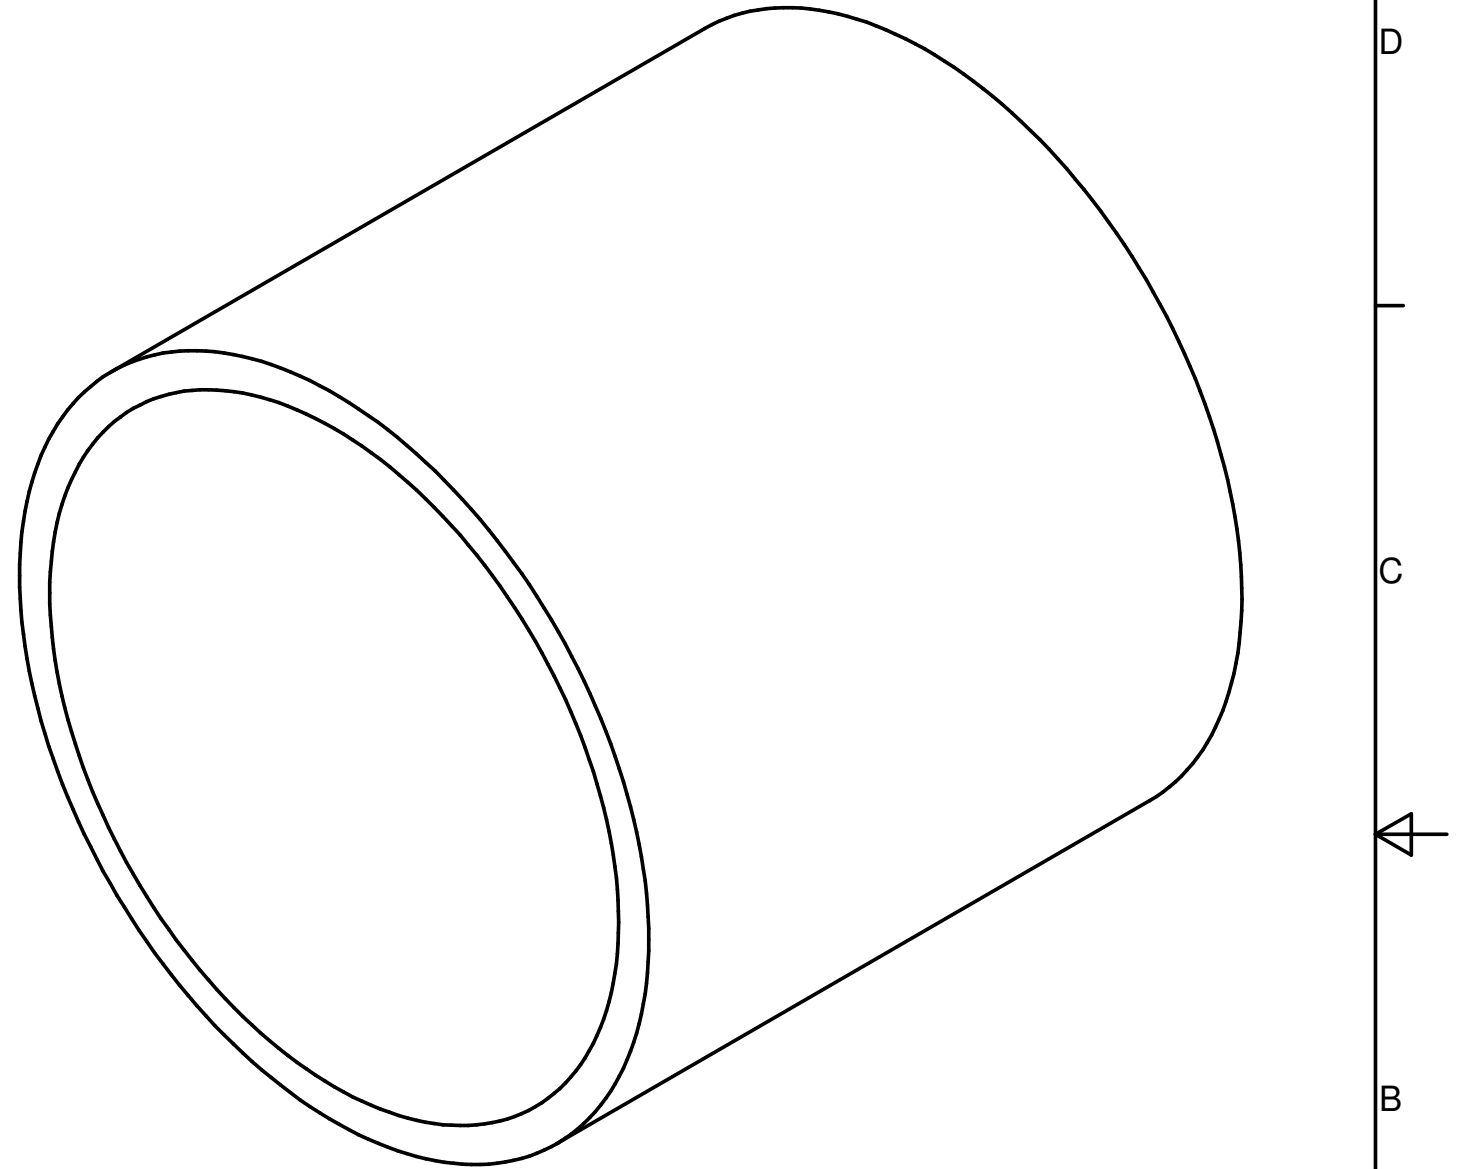

Issued all design changes as Rev C (tio) - 4/19/06 - SAB

								Rev. C			
								SCALE: 2:1		MAT: Ceramics, Al-300	
								ASSEMBLY: 75 kW CW Input Coupler			
				Date	Name	DESIGNATION: INTERNAL COVER TUBE FOR WARM WINDOW 100.124.004 1 A3					
				Drawn	10/9/04					Denis	
				Checked	08-06-05					VM	
				Standard							
State	Changes	Date	Name								