3.2

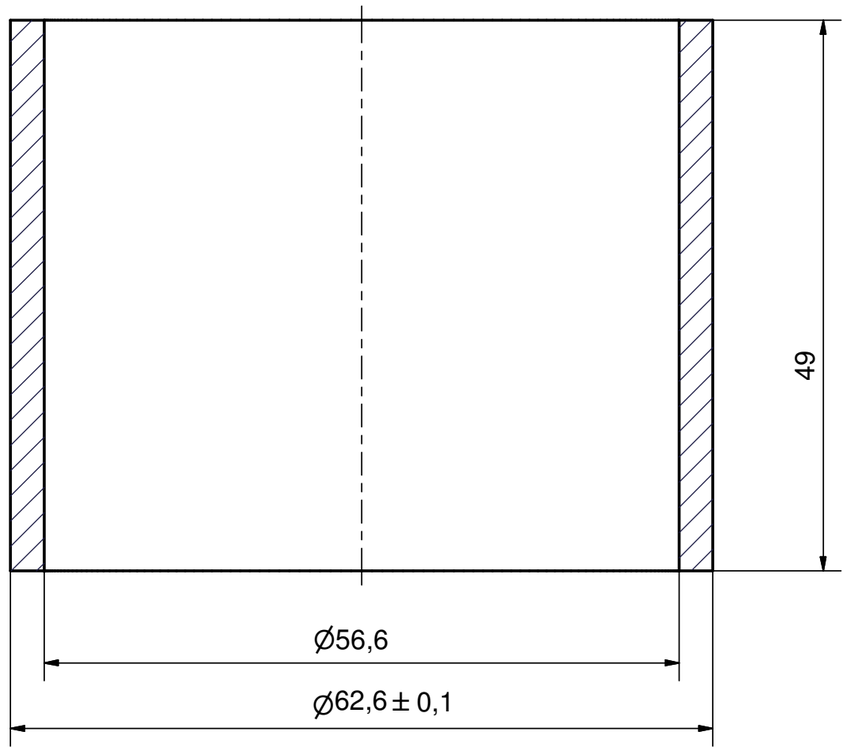

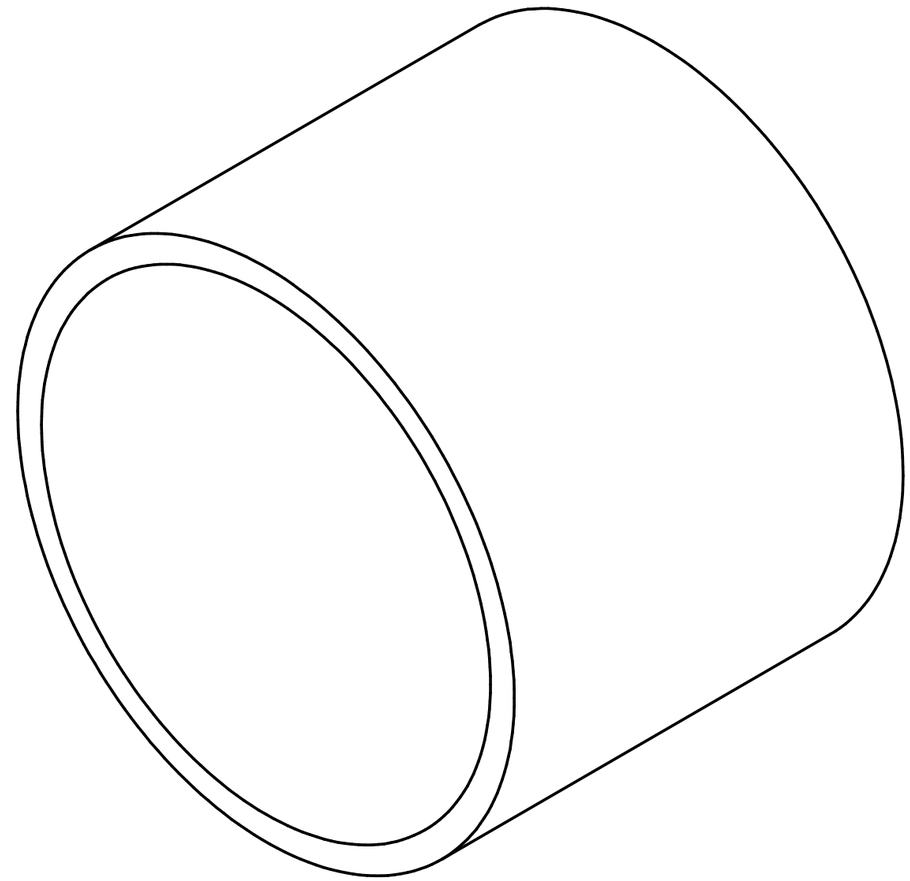

NOTES:

1. Round sharp edges R = 0.2 mm.
2. Degas ceramics for 1 hour at 800˚C in clean vacuum ($P < 10^{-5}$ mbar). After that, handle with gloves only.
3. Pack in lint-free paper or non-polymeric plastic bag.

Issued all design changes as Rev C (TIO) - 4/19/07 - SAB

						Rev. C
					SCALE: 2:1	MAT: Ceramics, Al-300
					ASSEMBLY: 75 kW CW Input Coupler	
				Date	Name	DESIGNATION:
				Drawn	10/9/04	Denis	INTERNAL COVER TUBE FOR COLD WINDOW
				Checked	08-06-05	VM	
				Standard			
						100.320.003	1
							A3
State	Changes	Date	Name				