



# Orbit Distortions for a One-pass Accelerator

CHESS &amp; LEPP

$$x' = a$$

$$a' = -(\kappa^2 + k)x + \Delta f$$

The extra force can for example come from an erroneous dipole field or from a correction coil:  $\Delta f = \frac{q}{p} \Delta B_y = \Delta \kappa$

Variation of constants:  $\vec{z} = \underline{M}\vec{z}_0 + \Delta\vec{z}$  with  $\Delta\vec{z} = \int_0^s \underline{M}(s - \hat{s}) \begin{pmatrix} 0 \\ \Delta\kappa(\hat{s}) \end{pmatrix} d\hat{s}$

$$\Delta\vec{z} = \int_0^L \begin{pmatrix} -\sqrt{\beta\hat{\beta}} \sin\hat{\psi} \\ \sqrt{\frac{\hat{\beta}}{\beta}} [\cos\hat{\psi} + \alpha \sin\hat{\psi}] \end{pmatrix} \Delta\kappa(\hat{s}) d\hat{s}$$

$$\Delta x(s) = \sum_k \Delta\vartheta_k \sqrt{\beta(s)\beta_k} \sin(\psi(s) - \psi_k)$$




# Orbit Correction for a One-pass Accelerator

CHESS & LEPP

When the closed orbit  $x_{\text{co}}^{\text{old}}(s_m)$  is measured at beam position monitors (BPMs, index  $m$ ) and is influenced by corrector magnets (index  $k$ ), then the monitor readings before and after changing the kick angles created in the correctors by  $\Delta\vartheta_k$  are related by

$$x_{\text{co}}^{\text{new}}(s_m) = x_{\text{co}}^{\text{old}}(s_m) + \sum_k \Delta\vartheta_k \sqrt{\beta_m \beta_k} \sin(\psi_m - \psi_k)$$

$$= x_{\text{co}}^{\text{old}}(s_m) + \sum_k O_{mk} \Delta\vartheta_k$$

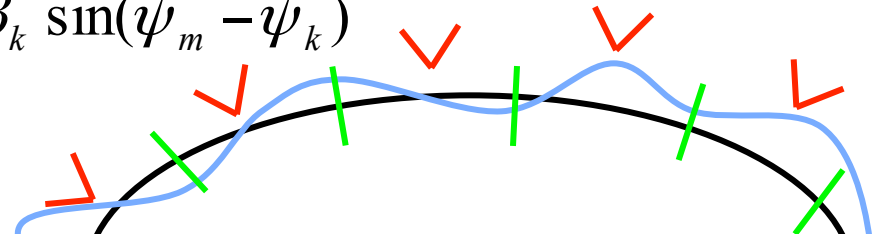

$$\vec{x}_{\text{co}}^{\text{new}} = \vec{x}_{\text{co}}^{\text{old}} + \underline{O} \Delta\vec{\vartheta}$$

$$\Delta\vec{\vartheta} = -\underline{O}^{-1} \vec{x}_{\text{co}}^{\text{old}} \Rightarrow \vec{x}_{\text{co}}^{\text{new}} = 0$$


It is often better not to try to correct the closed orbit at the the BPMs to zero in this way since

1. computation of the inverse can be numerically unstable, so that small errors in the old closed orbit measurement lead to a large error in the corrector coil settings.
2. A zero orbit at all BPMs can be a bad orbit inbetween BPMs



# Closed Orbit Bumps

CHESS &amp; LEPP

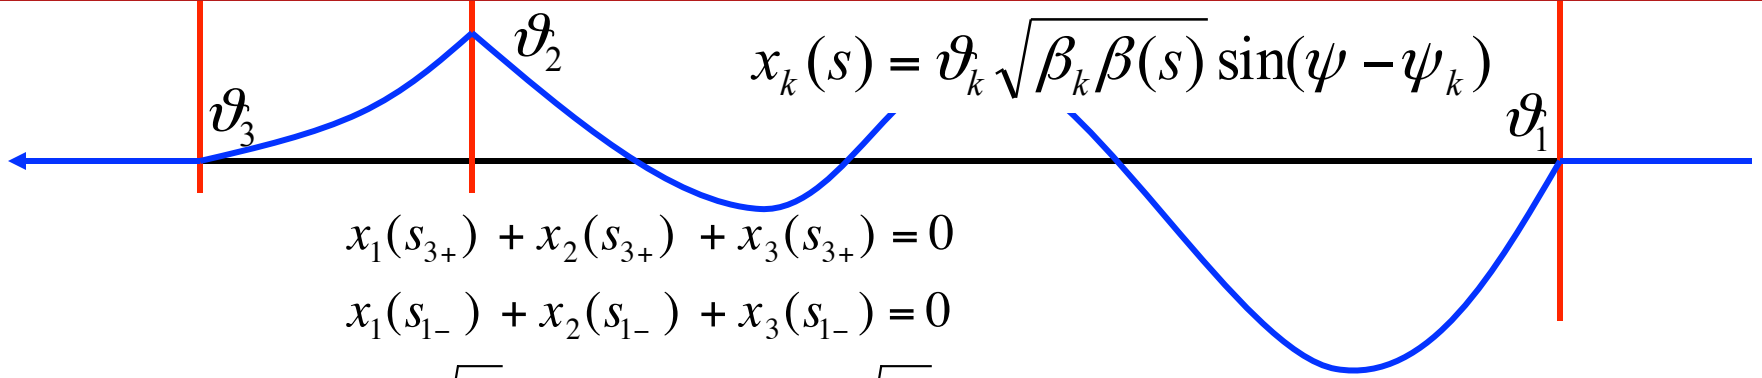

$$x_1(s_{3+}) + x_2(s_{3+}) + x_3(s_{3+}) = 0$$

$$x_1(s_{1-}) + x_2(s_{1-}) + x_3(s_{1-}) = 0$$

$$\vartheta_1 \sqrt{\beta_1} \sin(\psi_3 - \psi_1) + \vartheta_2 \sqrt{\beta_2} \sin(\psi_3 - \psi_2) = 0$$

$$\vartheta_3 \sqrt{\beta_3} \sin(\psi_3 - \psi_1) + \vartheta_2 \sqrt{\beta_2} \sin(\psi_2 - \psi_1) = 0$$

$$\frac{\vartheta_1}{\vartheta_2} = -\frac{\sin(\psi_3 - \psi_2) / \sqrt{\beta_1}}{\sin(\psi_3 - \psi_1) / \sqrt{\beta_2}}$$


$$\frac{\vartheta_2}{\vartheta_3} = -\frac{\sin(\psi_3 - \psi_1) / \sqrt{\beta_2}}{\sin(\psi_2 - \psi_1) / \sqrt{\beta_3}}$$

$$\vartheta_1 : \vartheta_2 : \vartheta_3 = \beta_1^{-\frac{1}{2}} \sin \psi_{32} : -\beta_2^{-\frac{1}{2}} \sin \psi_{31} : \beta_3^{-\frac{1}{2}} \sin \psi_{21}$$



# Oscillations around a distorted Orbit

CHESS & LEPP

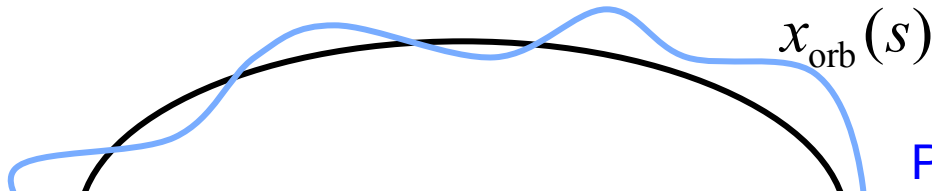

Particles oscillate around this periodic orbit, not around the design orbit.

$$\vec{z} = \vec{z}_\beta + \vec{z}_{\text{orb}}$$

$$\vec{z}_{\text{orb}}(s) = \underline{M} \vec{z}_{\text{orb}}(0) + \Delta \vec{z}(s)$$

$$\begin{aligned} \vec{z}_\beta(s) + \vec{z}_{\text{orb}}(s) &= \vec{z}(s) = \underline{M} \vec{z}(0) + \Delta \vec{z}(s) = \underline{M} [\vec{z}_\beta(0) + \vec{z}_{\text{orb}}(0)] + \Delta \vec{z}(s) \\ &= \underline{M} \vec{z}_\beta(0) + \vec{z}_{\text{orb}}(s) \end{aligned}$$

$$\vec{z}_\beta(L) = \underline{M}_0 \vec{z}_\beta(0)$$

The distorted orbit does not change the linear transport matrix.



# Dispersion Integral for One-pass Accelerators


CHESS & LEPP

$$x' = a$$

$$a' = -(\kappa^2 + k)x + \kappa\delta$$

$$\vec{z} = \underline{M}\vec{z}_0 + \int_0^s \underline{M}(s - \hat{s}) \begin{pmatrix} 0 \\ \delta\kappa(\hat{s}) \end{pmatrix} d\hat{s}$$

$$\Rightarrow \vec{D}(s) = \int_0^s \underline{M}(s - \hat{s}) \begin{pmatrix} 0 \\ \kappa(\hat{s}) \end{pmatrix} ds'$$

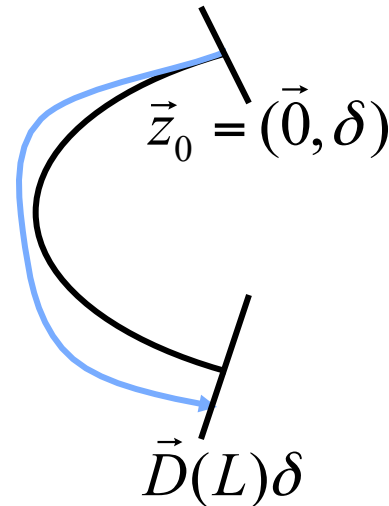

$$\Delta\kappa = \delta\kappa$$

$$D(s) = \sqrt{\beta(s)} \int_0^s \kappa(\hat{s}) \sqrt{\beta(\hat{s})} \sin(\psi(s) - \psi(\hat{s})) d\hat{s}$$



# The Closed Orbit of a Periodic Accelerator

CHESS &amp; LEPP

$$x' = a$$

$$a' = -(\kappa^2 + k)x + \Delta f$$

The extra force can for example come from an erroneous dipole field or from a correction coil:  $\Delta f = \frac{q}{p} \Delta B_y = \Delta \kappa$

Variation of constants:  $\vec{z} = \underline{M}\vec{z}_0 + \Delta\vec{z}$  with  $\Delta\vec{z} = \int_0^s \underline{M}(s - \hat{s}) \begin{pmatrix} 0 \\ \Delta\kappa(\hat{s}) \end{pmatrix} d\hat{s}$

For the periodic or closed orbit:  $\vec{z}_{\text{co}} = \underline{M}_0\vec{z}_{\text{co}} + \underline{M}_0 \int_0^L \underline{M}^{-1}(\hat{s}) \begin{pmatrix} 0 \\ \Delta\kappa(\hat{s}) \end{pmatrix} d\hat{s}$


$$\vec{z}_{\text{co}} = [\underline{M}_0^{-1} - \underline{1}]^{-1} \int_0^L \underline{M}^{-1}(\hat{s}) \begin{pmatrix} 0 \\ \Delta\kappa(\hat{s}) \end{pmatrix} d\hat{s}$$

$$= \frac{1}{2 - 2\cos\mu} [(\cos\mu - 1)\underline{1} + \sin\mu \underline{\beta}] \int_0^L \begin{pmatrix} -\sqrt{\beta\hat{\beta}} \sin\hat{\psi} \\ \sqrt{\frac{\hat{\beta}}{\beta}} [\cos\hat{\psi} + \alpha \sin\hat{\psi}] \end{pmatrix} \Delta\kappa(\hat{s}) d\hat{s}$$



# Periodic Closed Orbit from One Kick

CHESS &amp; LEPP

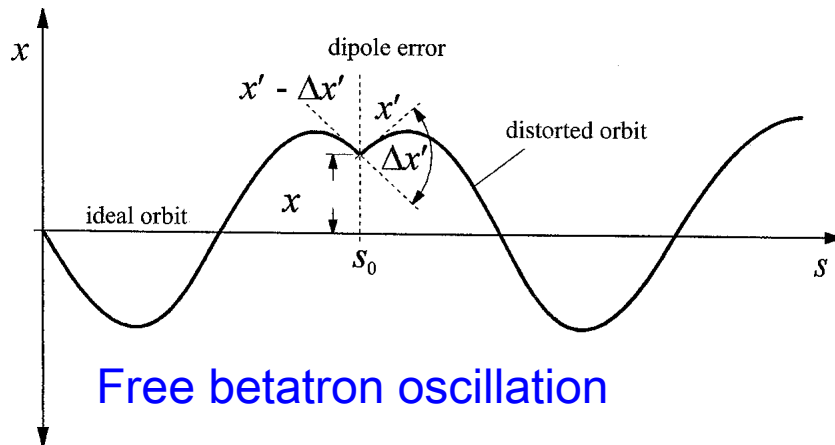

The oscillation amplitude  $J$  diverges when the tune  $\nu$  is close to an integer.

$$x_{\text{co}}(s) = \text{sig} \Delta \vartheta_k A \sqrt{\beta} \sin(\psi - \psi_k + \frac{\pi}{2} - \frac{\mu}{2})$$


sig = Sign(fractional part of  $\mu$ )

$$x'_{\text{co}}(s_k) - x'_{\text{co}}(s_k + L) = \Delta \vartheta_k$$

$$\text{sig} A \sin \frac{\mu}{2} = -\text{sig} A \sin \frac{\mu}{2} + \sqrt{\beta_k}$$

$$x_{\text{co}+}(s) = \Delta \vartheta_k \frac{\sqrt{\beta \beta_k}}{2 \sin \frac{\mu}{2}} \cos(\psi - \psi_k - \frac{\mu}{2})$$

$$x_{\text{co}-}(s) = \Delta \vartheta_k \frac{\sqrt{\beta \beta_k}}{2 \sin \frac{\mu}{2}} \cos(\psi - \psi_k + \frac{\mu}{2}) = \Delta \vartheta_k \frac{\sqrt{\beta \beta_k}}{2 \sin \frac{\mu}{2}} \cos(|\psi - \psi_k| - \frac{\mu}{2})$$

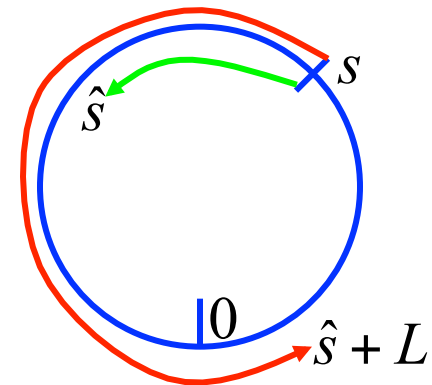



## Closed Orbit Correction


When the closed orbit  $x_{\text{co}}^{\text{old}}(s_m)$  is measured at beam position monitors (BPMs, index  $m$ ) and is influenced by corrector magnets (index  $k$ ), then the monitor readings before and after changing the kick angles created in the correctors by  $\Delta\vartheta_k$  are related by

$$x_{\text{co}}^{\text{new}}(s_m) = x_{\text{co}}^{\text{old}}(s_m) + \sum_k \Delta\vartheta_k \frac{\sqrt{\beta_m \beta_k}}{2 \sin \frac{\mu}{2}} \cos(|\psi_k - \psi_m| - \frac{\mu}{2})$$

$$= x_{\text{co}}^{\text{old}}(s_m) + \sum_k O_{mk} \Delta\vartheta_k$$

$$\vec{x}_{\text{co}}^{\text{new}} = \vec{x}_{\text{co}}^{\text{old}} + \underline{O} \Delta\vec{\vartheta}$$

$$\Delta\vec{\vartheta} = -\underline{O}^{-1} \vec{x}_{\text{co}}^{\text{old}} \Rightarrow \vec{x}_{\text{co}}^{\text{new}} = 0$$

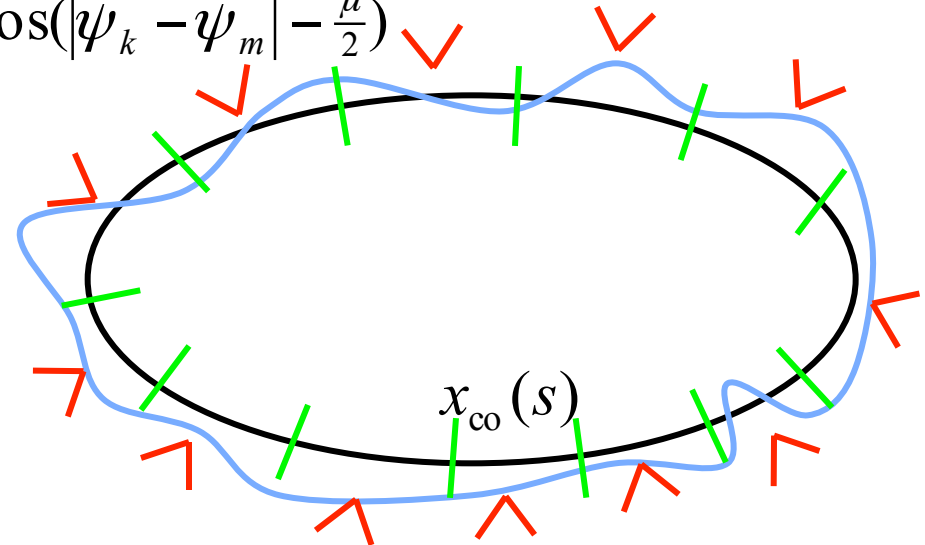

It is often better not to try to correct the closed orbit at the the BPMs to zero in this way since

1. computation of the inverse can be numerically unstable, so that small errors in the old closed orbit measurement lead to a large error in the corrector coil settings.
2. A zero orbit at all BPMs can be a bad orbit inbetween BPMs